
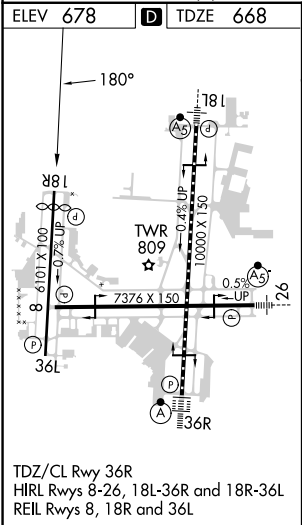


WAAS CH 69614 W18B	APP CRS 180°	Rwy Idg 5141 TDZE 668 Apt Elev 678
--	------------------------	---

RNAV (GPS) RWY 18R
TULSA INTL (TUL)

RNP APCH - GPS.		MISSED APPROACH: Climb to 3500 direct SUSNE and hold.
 Circling NA for Cat E south of Rwy 8-26. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. ASR Simultaneous approach authorized. LNAV procedure NA during simultaneous operations.		

D-ATIS 124.9 377.2	TULSA APP CON 124.0 338.3	TULSA TOWER 121.2 310.8 (Rwys 18L-36R, 8-26) 118.7 257.8 (Rwy 18R-36L)	GND CON 121.9 348.6	CLNC DEL 134.05 284.7
------------------------------	-------------------------------------	--	-------------------------------	---------------------------------

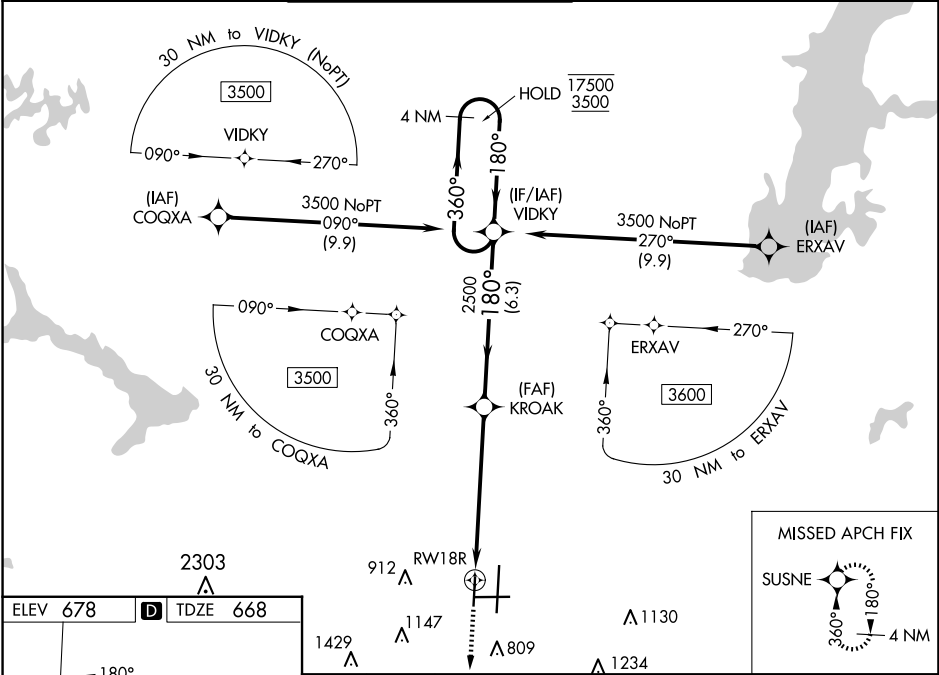

CATEGORY		A	B	C	D	E
LPV DA		868-3/4		200 (200-3/4)		
LNAV/VNAV DA		954-7/8		286 (300-7/8)		
LNAV MDA		1180-1 512 (600-1)		1180-1 3/8 512 (600-1 3/8)		
 CIRCLING		1180-1 502 (600-1)		1500-2 1/2 822 (900-2 1/2)	1520-2 3/4 842 (900-2 3/4)	1520-3 842 (900-3)