

WAAS CH 65925 W18A	APP CRS 179°	Rwy Idg TDZE 275 Apt Elev 279	5001 275 279
--	------------------------	---	---

RNAV (GPS) RWY 18

WALNUT RIDGE RGNL (ARG)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Jonesboro altimeter setting and increase LPV DA to 529 feet, LNAV/VNAV DA to 579 feet, and all MDAs 60 feet; increase Circling Cat D visibility ¼ SM. For inoperative ODALS, increase LPV all Cats and LNAV/VNAV all Cats visibility to ¾ mile and LNAV Cat C and D visibility to 1 mile. Baro-VNAV and VDP NA with Jonesboro altimeter setting.

ODALS

MISSED APPROACH:

Climb to 3100 direct GUBFO and hold.

AWOS-3PT 126.525	MEMPHIS CENTER 120.075 289.4	UNICOM 122.8 (CTAF)
----------------------------	--	-------------------------------

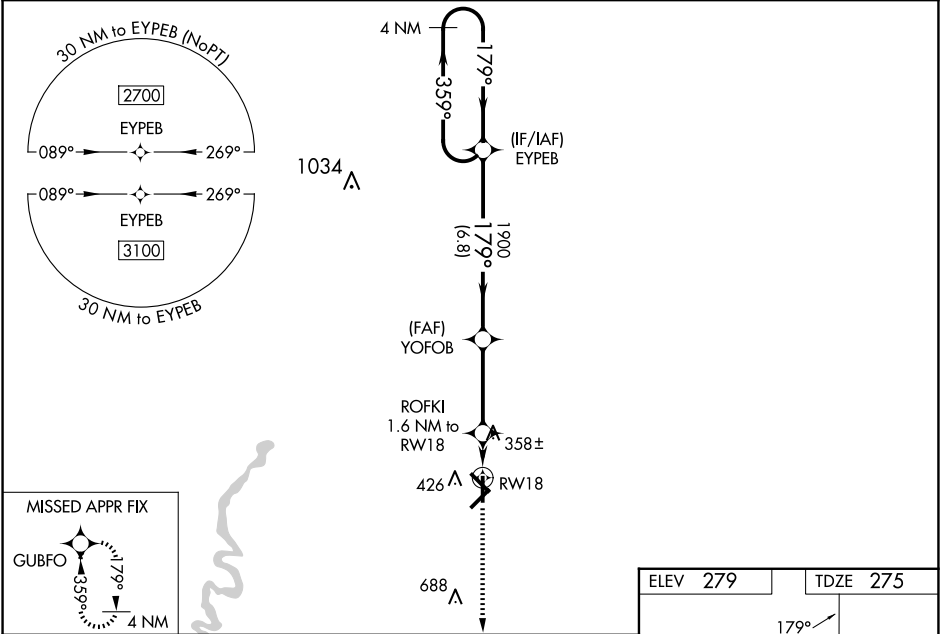

4 NM Holding Pattern		EYEPB	YOFOB	ROFKI	GUBFO
2700		179°	1900	1.6 NM to RW18	3100
GP 3.00° TCH 45		359°	179°	*1 NM to RW18	*LNAV only.
		6.8 NM	3.4 NM	0.6 NM	1 NM
CATEGORY	A	B	C	D	
LPV DA		475-¾	200 (200-¾)		
LNAV/VNAV DA		525-¾	250 (300-¾)		
LNAV MDA	620-¾	345 (400-¾)	620-⅞	345 (400-⅞)	
CIRCLING	760-1	481 (500-1)	800-1½ 521 (600-1½)	1000-2¼ 721 (800-2¼)	

