

WAAS CH 82125 W22A	APP CRS 224°	Rwy Idg 6001 TDZE 274 Apt Elev 279
--	------------------------	---



RNAV (GPS) RWY 22


WALNUT RIDGE RGNL (ARG)

V Baro-VNAV NA when using Jonesboro altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. **A** VDP NA with Jonesboro altimeter setting. When local altimeter setting not received, use Jonesboro altimeter setting and increase LPV and LNAV/VNAV DA to 578 feet, and all MDAs 60 feet; increase LNAV Cats C/D visibility ¼ SM and Circling Cat D visibility ¼ SM.

MISSED APPROACH:
Climb to 2700 direct
XJHAM and hold.

AWOS-3PT 126.525	MEMPHIS CENTER 120.075 289.4	UNICOM 122.8 (CTAF) 1
----------------------------	--	--

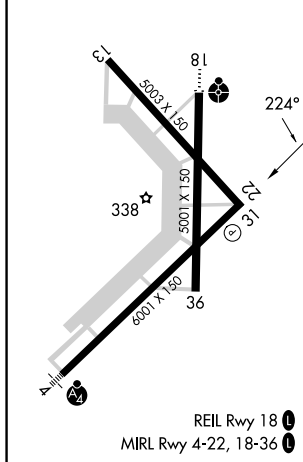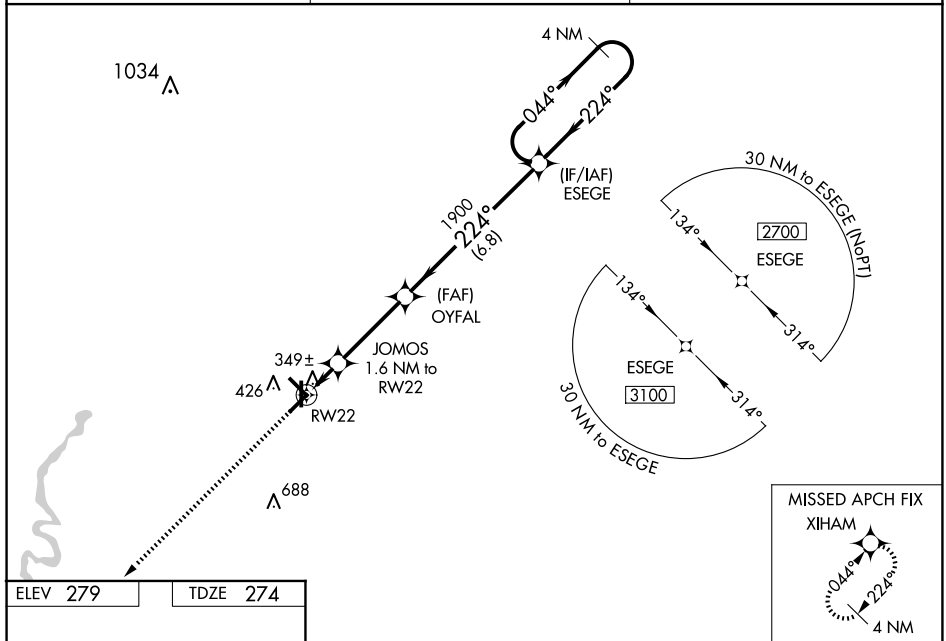

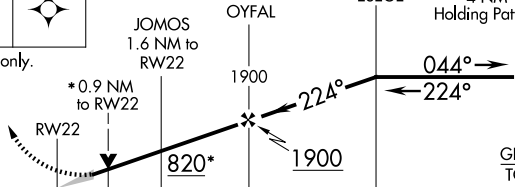2700 ↑		XIHAM 			
*LNAV only.					
CATEGORY	A	B	C	D	
LPV DA	524-1 250 (300-1)				
LNAV/ VNAV DA	524-1 250 (300-1)				
LNAV MDA	600-1 326 (400-1)				
CIRCLING	760-1 481 (500-1)		800-1½ 521 (600-1½)	1000-2¼ 721 (800-2¼)	