

WAAS CH 45825 W36A	APP CRS 359°	Rwy Idg TDZE Apt Elev	5001 274 279
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 36


WALNUT RIDGE RGNL (ARG)

⚠

Baro-VNAV NA when using Jonesboro altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Jonesboro altimeter setting and increase LPV DA to 528 feet, LNAV/VNAV DA to 628 feet, and all MDAs 60 feet; increase LNAV Cats C/D and Circling Cat D visibility ¼ SM.

MISSED APPROACH:
Climb to 2700 direct EYPEB and hold.

AWOS-3PT 126.525	MEMPHIS CENTER 120.075 289.4	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

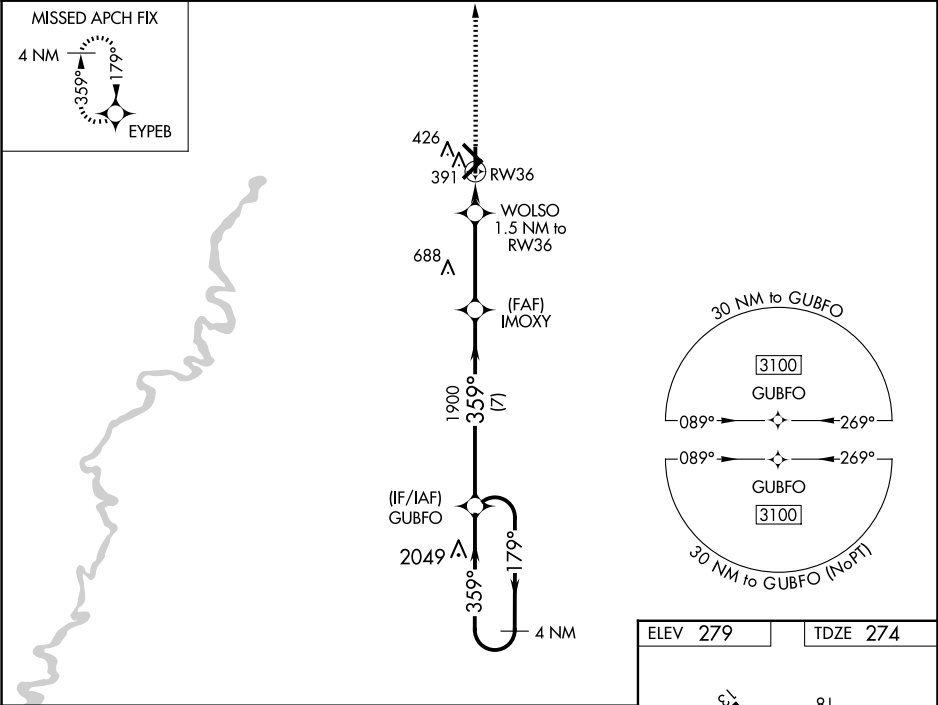

2700	EYPEB				
*LNAV only.		WOLSO 1.5 NM to RW36	IMOXY 1900	GUBFO	4 NM Holding Pattern
		780*	1900	3100	GP 3.00° TCH 45
		1.5 NM	3.5 NM	7 NM	
CATEGORY	A	B	C	D	
LPV DA		474-1	200 (200-1)		
LNAV/VNAV DA		574-1	300 (300-1)		
LNAV MDA	660-1	386 (400-1)	660-1 1/8	386 (400-1 1/8)	
CIRCLING	760-1	481 (500-1)	800-1 1/2 521 (600-1 1/2)	1000-2 1/4 721 (800-2 1/4)	

