


WAAS CH 77825 W04A	APP CRS 044°	Rwy Idg TDZE Apt Elev	6001 279 279
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4

WALNUT RIDGE RGNL (ARG)

RNP APCH - GPS.	MALSF	MISSED APPROACH: Climb to 2700 direct ESEGE and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM. Inop table does not apply to LPV and LNAV/VNAV all Cats.		

AWOS-3PT 126.525	MEMPHIS CENTER 120.075 289.4	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

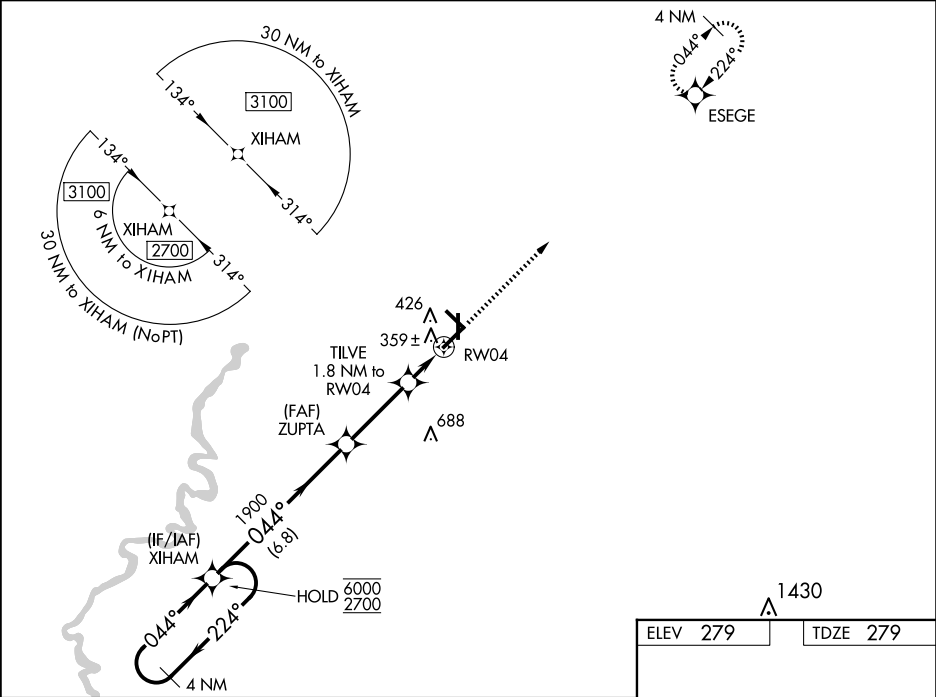

4 NM Holding Pattern		XIHAM	ZUPTA	TILVE	2700	ESEGE
6000 2700		224°	044°	1900	900	
GP 3.00° TCH 45						
		6.8 NM	3.1 NM	0.9 NM	0.9 NM	
CATEGORY	A	B	C	D		
LPV DA		529-¾	250 (300-¾)			
LNAV/VNAV DA		529-¾	250 (300-¾)			
LNAV MDA		620-¾	341 (400-¾)			
CIRCLING	840-1	561 (600-1)	840-1½ 561 (600-1½)	1000-2¼ 721 (800-2¼)		

