

WAAS
CH **82305**
W17A

APP CRS
174°

Rwy Idg
TDZE **1741**
Apt Elev **1749**

RNAV (GPS) RWY 17

WATERTOWN RGNL (ATY)

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV
NA below -18°C or above 54°C.

MISSED APPROACH: Climb to 4000 direct APEDE and on track 154° to VESTY and hold.

ASOS 126.625	MINNEAPOLIS CENTER 128.5 306.2	UNICOM 123.05 (CTAF) 0
------------------------	--	----------------------------------

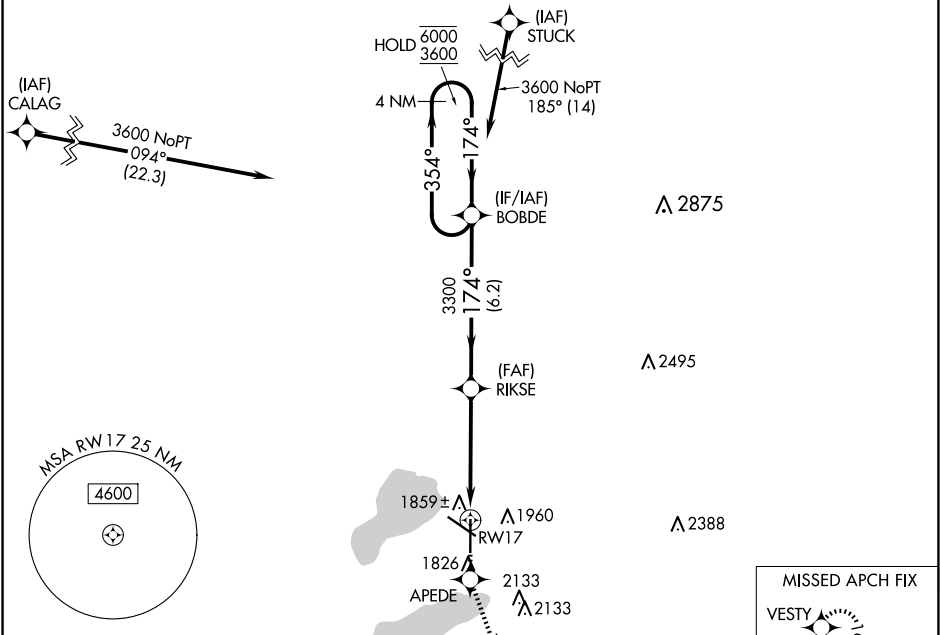

ELEV 1749

D

TDZE 1741

1800

6893 X 100

35

174°

30

REIL Rwy 12, 17 and 30

HIRL Rwy 17-35

MIRL Rwy 12-30

4000

APEDE

tr 154°

VESTY

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 35).

4 NM Holding Pattern

354°

174°

3300

6000

3600

GP 3.00°

TCH 45

CATEGORY	A	B	C	D
LPV DA	2055-7/8 314 (400-7/8)			
LNAV/VNAV DA	2130-1 1/8 389 (400-1 1/8)			
LNAV MDA	2120-1 379 (400-1)			
CIRCLING	2260-1 511 (600-1)	2500-2 1/4 751 (800-2 1/4)	2500-2 1/2 751 (800-2 1/2)	