



APP CRS	Rwy ldg	9000
355°	TDZE	480
	Apt Elev	542

RNAV (RNP) Z RWY 36R

AUSTIN-BERGSTROM INTL (AUS)

RNP AR APCH. RADAR required.	MALSR 	MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 direct HOOKK and hold.
Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C. For inop ALS, increase RNP 0.11 all Cats visibility to RVR 4500, RNP 0.16 all Cats visibility to RVR 6000, and RNP 0.30 all Cats visibility to 1 1/4 SM.		

D-ATIS 124.4	AUSTIN APP CON 127.225 317.65 (EAST) 120.875 270.25 (SOUTH) 119.0 370.85 (WEST)	AUSTIN TOWER 121.0 281.5	GND CON 121.9 348.6	CLNC DEL 125.5 263.0	CPDLC
-----------------	--	-----------------------------	------------------------	-------------------------	-------

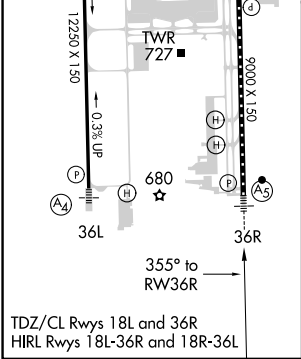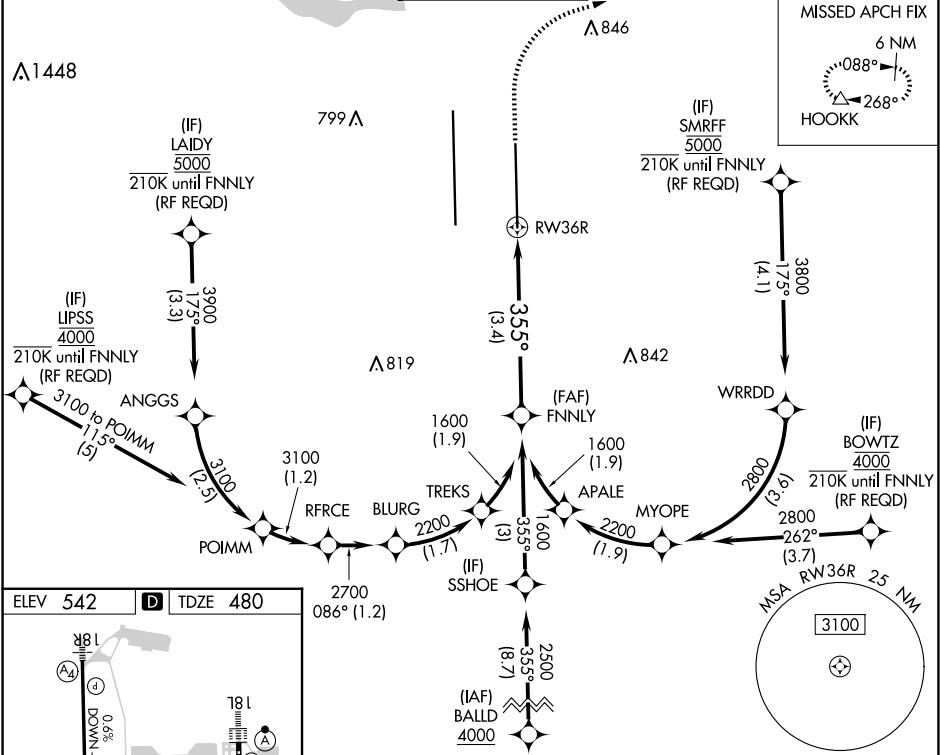

1000	3000	HOOKK	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 59°).	FNNLY
			See planview for multiple IF locations.	1600
GP 3.00° TCH 52				
3.4 NM				
CATEGORY	A	B	C	D
RNP 0.11 DA		744/24	264 (300-1/2)	
RNP 0.16 DA		862/35	382 (400-3/4)	
RNP 0.30 DA		915/40	435 (400-3/4)	
AUTHORIZATION REQUIRED				