


WAAS CH 90132 W06A	APP CRS 060°	Rwy Idg TDZE 586 Apt Elev 592
--	------------------------	---


RNAV (GPS) RWY 6
NIAGARA FALLS INTL (IAG)

RNP APCH. Baro-VNAV NA when using Buffalo Niagara Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). When local altimeter setting not received, use Buffalo Niagara Intl altimeter setting and increase all DA 51 feet and all MDA 60 feet, increase LNAV Cat C and D visibility ½ SM and Circling Cat C and D ¼ SM. Rwy 6, 10R, 24, 28L helicopter visibility reduction below 1 SM NA. Straight-in Rwy 6 NA at night, Circling Rwy 6, 10R, 24, 28L NA at night.	MISSED APPROACH: Climb to 3600 direct ZUPUV and hold.
---	--

ATIS 120.8 269.4	BUFFALO APP CON 126.5 317.6	NIAGARA TOWER★ 118.5 (CTAF) 0 349.0	GND CON 125.3 275.8	CLNC DEL 119.25 251.1	UNICOM 122.95
----------------------------	---------------------------------------	---	-------------------------------	---------------------------------	-------------------------

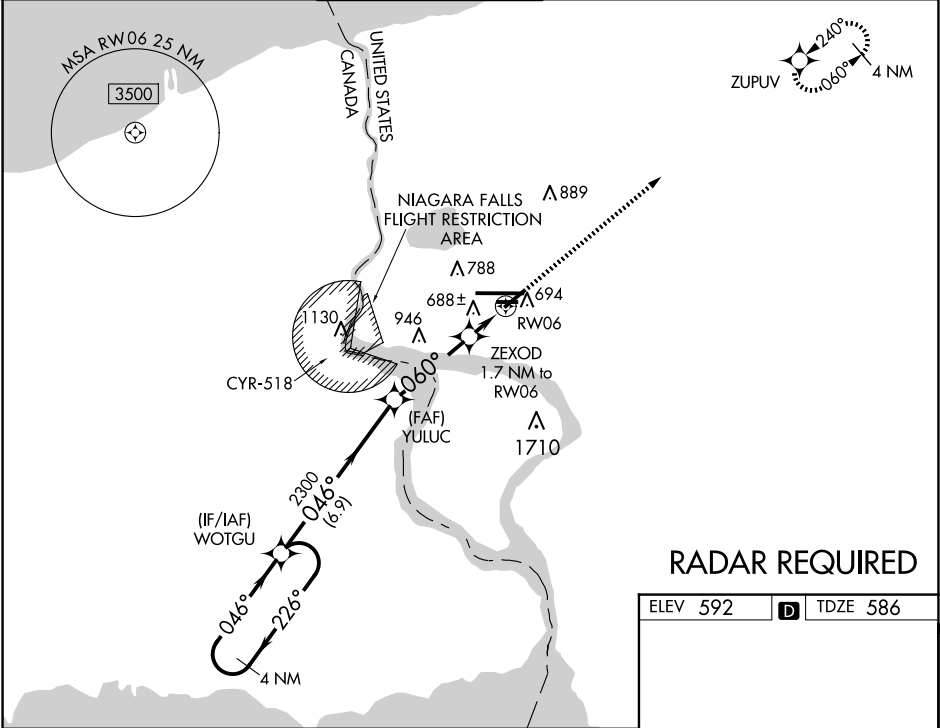

RADAR REQUIRED

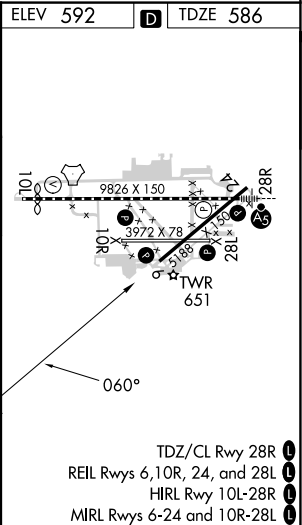

4 NM Holding Pattern	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 45).	3600 ZUPUV
GP 3.00° TCH 55	WOTGU YULUC ZEXOD 1.7 NM to RW06 RW06 *LNAV only	
3300 ← 226° 046° → 2300	6.9 NM 3.5 NM 1.7 NM	
CATEGORY	A B C D	
LPV DA	864-1 278 (300-1)	
LNAV/VNAV DA	849-1 263 (300-1)	
LNAV MDA	940-1 354 (400-1)	
CIRCLING	1100-1 508 (600-1)	1280-2 688 (700-2) 1280-2¼ 688 (700-2¼)