

WAAS CH 66099 W31A	APP CRS 312°	Rwy Idg TDZE 1679 Apt Elev 1716
--	------------------------	---

RNAV (GPS) RWY 31

MINOT INTL (MOT)

RNP APCH.

V

Δ

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS increase LNAV/VNAV visibility to RVR 4500.


MALSR

AS


≡



MISSED APPROACH: Climb to 4500 direct DOYAB and hold.

ASOS 118.725	MINOT APP CON ★ 119.6 363.8	MAGIC CITY TOWER ★ 118.2(CTAF) 251.125	GND CON 121.9	UNICOM 122.95
------------------------	---------------------------------------	--	-------------------------	-------------------------

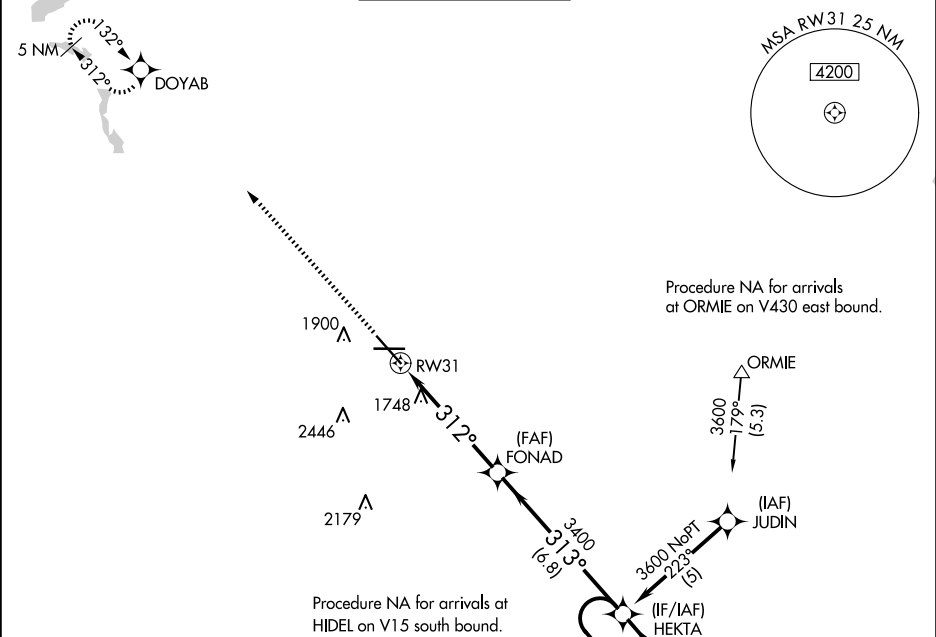

ELEV 1716	D	TDZE 1679
-----------	-------------------------	-----------

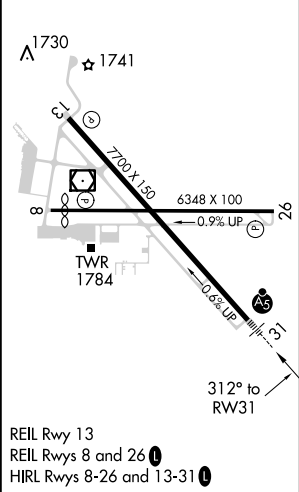

 3147 (IAF) 3600 NoPT HIDEL 0.9 NM (6.4) 133° 313° 5 NM HOLD 6000 3600				
4500 	DOYAB 	HEKTA 5 NM Holding Pattern		
*LNAV only	*0.9 NM to RW31	FONAD 3400	133°→ 6000 ← 313° 3600	
 RW31 312° 3400 GP 3.00° TCH 49	0.9 NM	4.3 NM	6.8 NM	
CATEGORY	A	B	C	D
LPV DA	1929/24 250 (300-½)			
LNAV/VNAV DA	1966/24 287 (300-½)			1966/40 287 (300-¾)
LNAV MDA	2000/24	321 (300-½)	2000/26 321 (300-½)	2000/50 321 (300-1)
CIRCLING	2200-1 484 (500-1)	2240-1 524 (600-1)	2800-3 1084 (1100-3)	