



WAAS CH 70505 W22A	APP CRS 221°	Rwy Idg TDZE 1500 Apt Elev 1500
--	------------------------	---

RNAV (GPS) RWY 22

JAMESTOWN RGNL (JMS)

▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (5°F) or above 54°C (130°F). DME/DME RNP- 0.3 NA.	MISSED APPROACH: Climb to 3700 direct GANEY and hold.
--	---

ASOS 118.425	MINNEAPOLIS CENTER 124.2 270.3	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

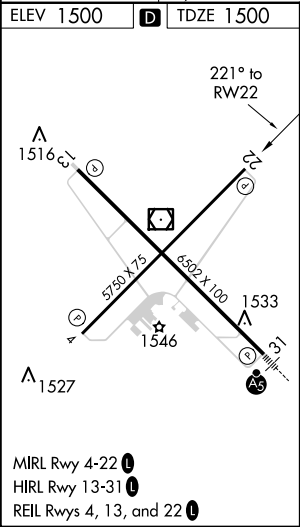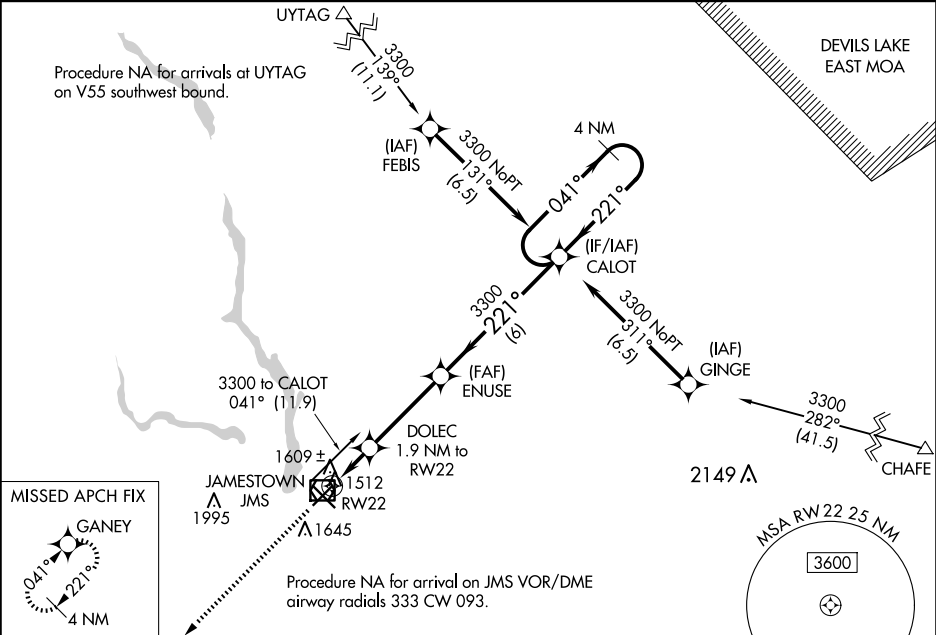

3700 ↑	GANEY 	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 21).			
*RNAV only	DOLEC 1.9 NM to RW22	ENUSE 3300	CALOT	4 NM Holding Pattern	
*1.1 NM to RW22		3300	041° →		3300
RW22		221°	← 221°		GP 3.00° TCH 45
1.1 NM		0.9 NM	3.6 NM	6 NM	
CATEGORY	A	B	C	D	
LPV DA	1750-3/4 250 (300-3/4)				
LNAV/ VNAV DA	1790-1 290 (300-1)				
LNAV MDA	1860-1 360 (400-1)				
 CIRCLING	1960-1	460 (500-1)	2000-1 1/2 500 (500-1 1/2)	2300-2 1/2 800 (800-2 1/2)	