

LOM OS
395

APP CRS
003°

Rwy Idg
TDZE
Apt Elev
8002
808
808

NDB RWY 36

WITTMAN RGNL (OSH)

▼


▲ NA

When local altimeter setting not received, use Fond Du Lac altimeter setting and increase all MDA 40 feet; increase S-36 Cat C/D and Circling Cat C visibilities ½ mile; increase Circling Cat D visibility ¼ mile. For inop MALSR, increase S-36 Cat D visibility to 1½ mile. For inop MALSR when using Fond Du Lac altimeter setting, increase S-36 Cat D visibility to 2 miles. Circling to Rwy 5, 23, and 31 NA at night.

MALSR

MISSED APPROACH:
Climbing right turn to 3000 on heading 090° then right turn direct POBER LOM and hold.

ATIS 125.9	MILWAUKEE APP CON 127.0 263.075	OSHKOSH TOWER ★ 118.5 (CTAF) 290.9	GND CON 132.3	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

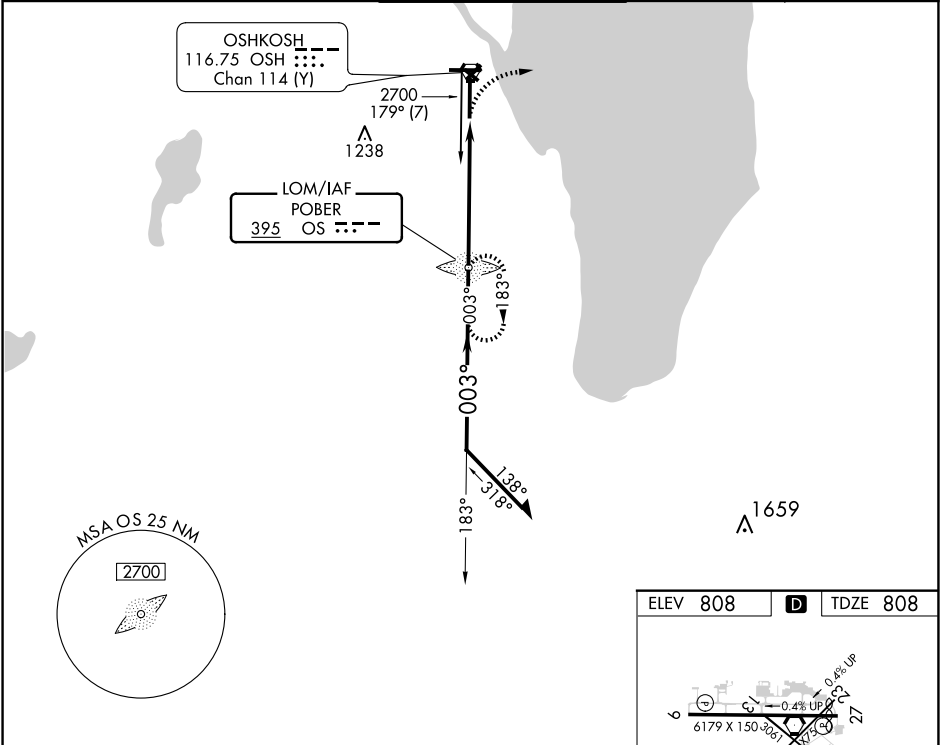

Remain within 10 NM

OS LOM

2700

183°

003°

2700

3.21°

TCH 52

5.4 NM

3000

hdg 090°

OS

CATEGORY

A

B

C

D

S-36

1460/40

652 (700-¾)

1460-1 ¾

652 (700-1 ½)

CIRCLING

1460-1

652 (700-1)

1460-1 ¾

652 (700-2)

ELEV 808

D

TDZE 808

REIL Rwy 18 and 27

HIRL Rwy 9-27 and 18-36

FAF to MAP 5.4 NM

Knots

60

90

120

150

180

Min:Sec

5:24

3:36

2:42

2:10

1:48

EC-3, 17 APR 2025 to 15 MAY 2025

EC-3, 17 APR 2025 to 15 MAY 2025