

WAAS CH 53439 W16A	APP CRS 162°	Rwy Idg TDZE 152 Apt Elev 160	5398
--	------------------------	---	-------------

RNAV (GPS) RWY 16


NEWPORT MUNI (ONP)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Tillamook altimeter setting. DME/DME RNP-0.3 NA. Inop table does not apply to LPV all Cats. When local altimeter setting not received, use Tillamook altimeter setting: increase LPV DA to 537 feet and LNAV/VNAV DA to 748 feet and all MDA 140 feet; increase LNAV/VNAV all Cats visibility and LNAV Cat C/D visibility 3⁄8 mile and increase Circling Cat B visibility 1⁄4 mile. For inop MALS, increase LNAV/VNAV all Cats visibility to 1 1⁄2 mile, and increase LNAV Cat A/B visibility to 1 mile, Cat C/D to 1 3⁄8 mile. For inop MALS when using Tillamook altimeter setting, increase LPV all Cats visibility to 1 1⁄4 mile, and LNAV Cat A/B visibility to 1 mile, LNAV Cat C/D to 1 3⁄4 mile. Rwy 16 helicopter visibility reduction below 3⁄4 SM NA.

MALS

MISSED APPROACH:
Climb to 600 then climbing right then 3700 direct BOILR and hold.

AWOS-3 133.9	SEATTLE CENTER 125.8 291.7	UNICOM 122.8 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

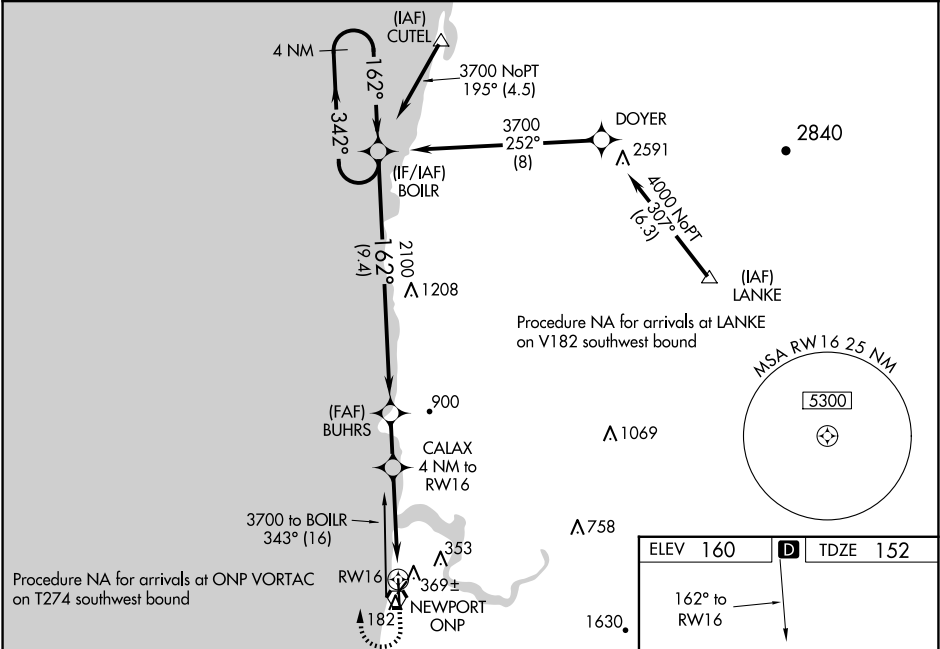

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 51).		600	3700	BOILR
GP 3.00° TCH 55		BOILR		BUHRS	CALAX 4 NM to RW16	*LNAV only
3700		342° 162°		2100	*1.3 NM to RW16	RW16
9.4 NM		2 NM		2.7 NM		1.3 NM
CATEGORY	A	B	C	D		
LPV DA	402-3⁄4		250 (300-3⁄4)			
LNAV/VNAV DA	613-1 1⁄8		461 (500-1 1⁄8)			
LNAV MDA	620-3⁄4		468 (500-3⁄4)		620-1 468 (500-1)	
CIRCLING	880-1 720 (800-1)		1000-1 1⁄4 840 (900-1 1⁄4)		1400-3 1240 (1300-3) 1600-3 1440 (1500-3)	

