



LOC/DME I-RBD	APP CRS	Rwy Idg	6601
110.75	309°	TDZE	660
Chan 44 (Y)		Apt Elev	661

ILS or LOC RWY 31

DALLAS EXEC (RBD)

RADAR required for procedure entry, DME or RADAR required for LOC only.	MISSED APPROACH: Climb to 1200 then climbing right turn to 2500 on heading 090° and CVE VOR/DME R-125 to FLIPP/CVE 38.5 DME and hold.
▼ ▲	

ATIS	LONE STAR APP CON	EXECUTIVE TOWER★	GND CON	CLNC DEL	UNICOM
126.35	125.2 343.65	127.25 (CTAF) 0	119.475	118.625	122.95

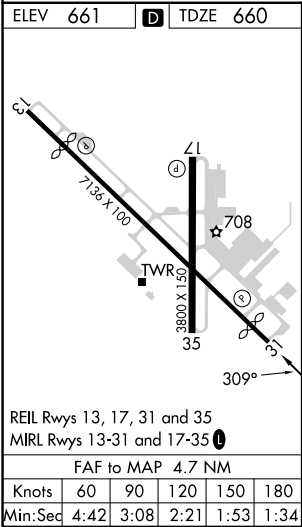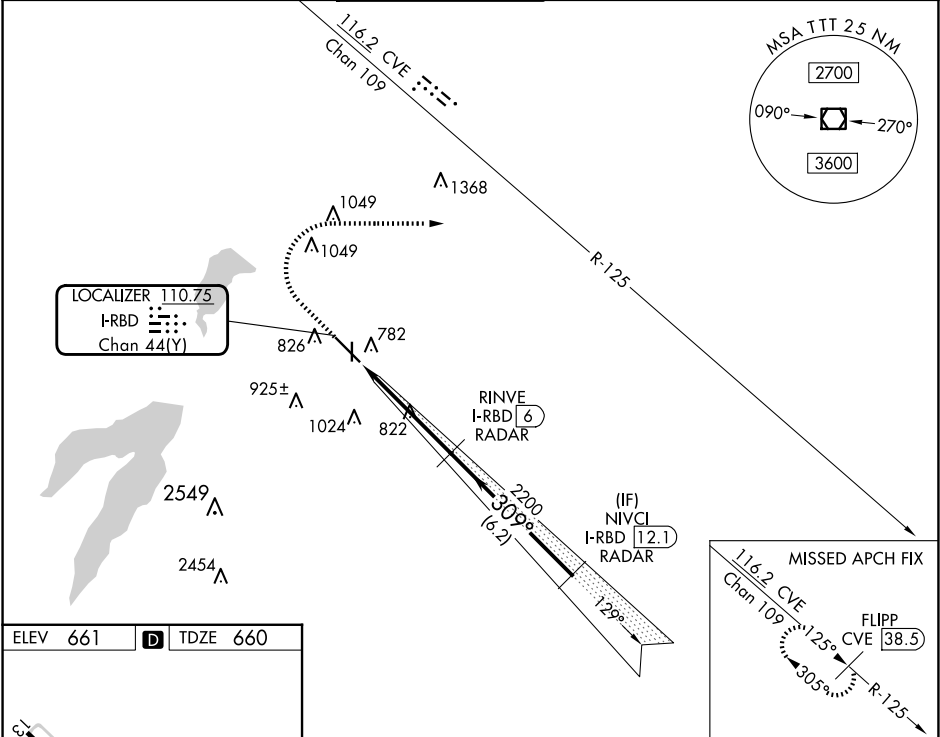

	1200	2500	CVE R-125	FLIPP CVE 38.5	RINVE I-RBD 6 RADAR	NIVCL I-RBD 12.1 RADAR
	↑	hdg 090°				
*LOC only.			*I-RBD 2.4			
			I-RBD 1.2			
			1.2 NM	3.5 NM	6.2 NM	
CATEGORY	A	B	C	D		
S-ILS 31	860-3/4 200 (200-3/4)					
S-LOC 31	1080-1 420 (500-1)		1080-1 1/8 420 (500-1 1/8)			
CIRCLING	1160-1 499 (500-1)	1220-1 559 (600-1)	1340-2 679 (700-2)	1400-2 1/4 739 (800-2 1/4)		

SC-2, 17 APR 2025 to 15 MAY 2025

SC-2, 17 APR 2025 to 15 MAY 2025