

LOC/DME I-HRL	APP CRS	Rwy Idg	9400
111.5	178°	TDZE	35
Chan 52		Apt Elev	36

ILS or LOC RWY 18R

VALLEY INTL (HRL)

RNP APCH - GPS.

▼



▲

When local altimeter setting not received, use Port Isabel altimeter setting: increase S-ILS 18R DA to 277 feet; increase all MDAs 60 feet and S-LOC 18R visibility Cat C/D to RVR 4000 and Circling Cat C/D ¼ SM. For inop ALS when using Port Isabel altimeter setting, increase S-LOC 18R visibility Cat C/D to RVR 5500. VDP NA when using Port Isabel altimeter setting.
*RVR 1800 authorized with use of FD or AP or HUD to DA . (NA when using secondary altimeter setting).

MALSR

MISSED APPROACH: Climb to 500 then climbing left turn to 2000 direct RELAX and hold.

ATIS	VALLEY APP CON	HARLINGEN TOWER ★	GND CON	UNICOM
124.85	120.7 279.5	119.3 (CTAF) 0 317.6	121.7	122.95

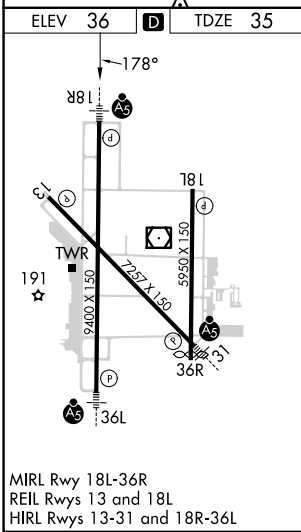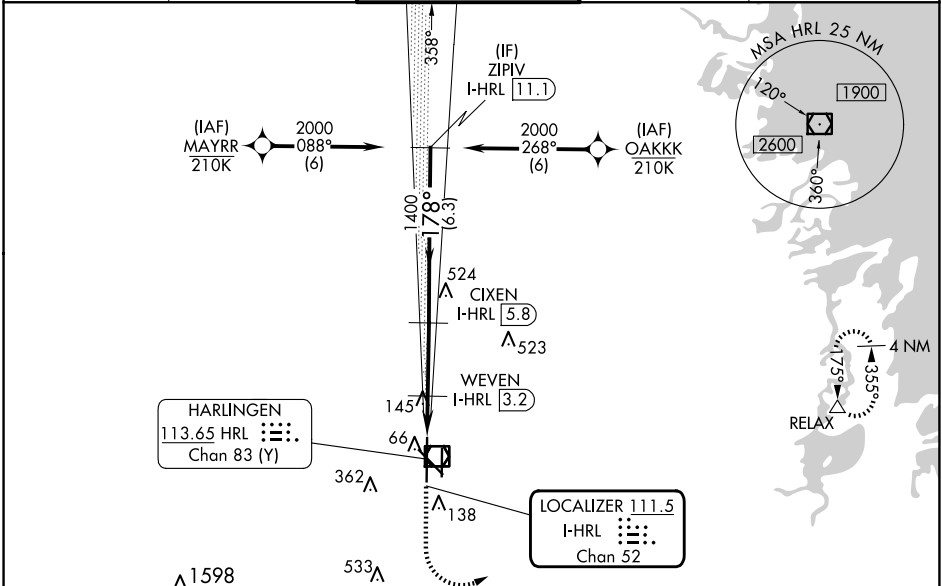

500 ↑	2000 ↘	RELAX △	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71)			
CATEGORY A B C D						
S-ILS 18R* 235/24 200 (200-½)						
S-LOC 18R 400/24 365 (400-½) 400/35 365 (400-¾)						
CIRCLING 460-1 560-1 600-1½ 680-2 424 (500-1) 524 (600-1) 564 (700-1½) 644 (700-2)						

SC-3, 17 APR 2025 to 15 MAY 2025

SC-3, 17 APR 2025 to 15 MAY 2025