

WAAS CH 99611 W32A	APP CRS 323°	Rwy Idg 9001 TDZE 1293 Apt Elev 1297
--	------------------------	---



RNAV (GPS) RWY 32
MANSFIELD LAHM RGNL (MFD)

⚠ Baro-VNAV NA w/en using Marion altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. When local altimeter not received, use Marion altimeter setting and increase all DA 107 feet and all MDA 120 feet, LNAV/VNAV all Cts visibility ½ SM, LNAV Ctd C/D visibility ¾ SM and Circling Ctd C/D visibility ½ SM. For inop MALSR when using Marion altimeter setting increase LPV all Cts visibility to 1. VDP NA with Marion altimeter setting. ** RVR 1800 authorized with use of FD or AP or HUD to DA. NA when using Marion altimeter setting.





MISSED APPROACH:
Climb to 3000 direct
UPIYO and hold.

ATIS 125.3	CLEVELAND APP CON ★ 128.35 360.65	MANSFIELD TOWER ★ 119.8 (CTAF) 0 291.775	GND CON 121.8 291.775	UNICOM 122.95
---------------	--------------------------------------	---	--------------------------	------------------

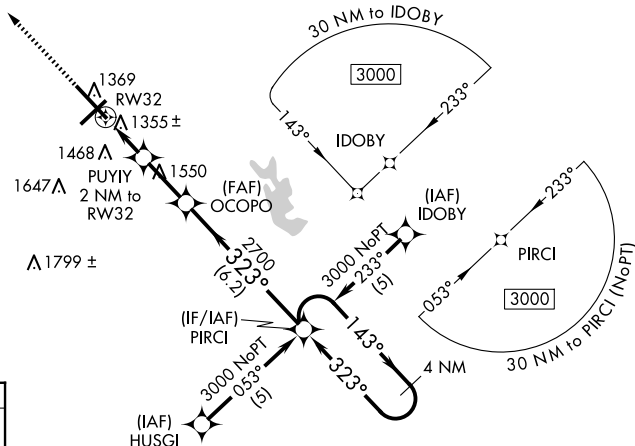

ELEV 1297	D	TDZE 1293
-----------	----------	-----------

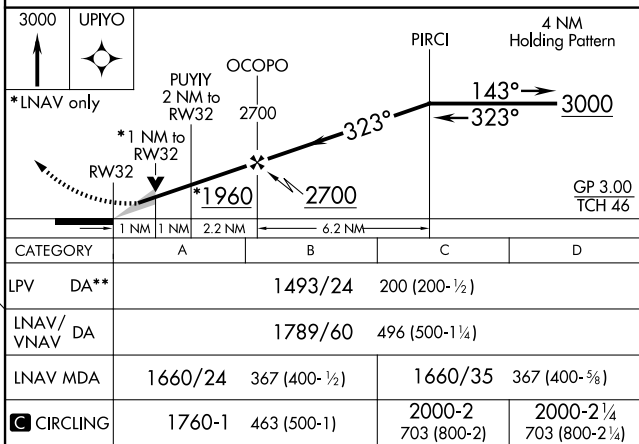

MANFIELD, OHIO
Orig-F 13AUG20

40°49'N-82°31'W

MANSFIELD LAHM RGNL (MFD)
RNAV (GPS) RWY 32

EC-2, 17 APR 2025 to 15 MAY 2025

EC-2, 17 APR 2025 to 15 MAY 2025