

NA



ASR

For inop ALS, increase S-LOC 36 Cats C/D visibility to 1½ SM.
**RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1400 then climbing left turn to 2500 direct GRB VORTAC and hold.

ATIS 124.1	GREEN BAY APP CON ★ 119.4 338.2	GREEN BAY TOWER ★ 118.7 (CTAF) 257.8	GND CON 121.9	CLNC DEL 121.75
---------------	------------------------------------	---	------------------	--------------------

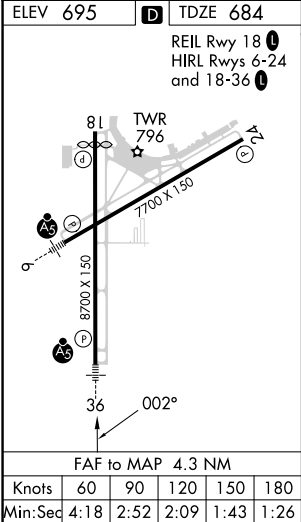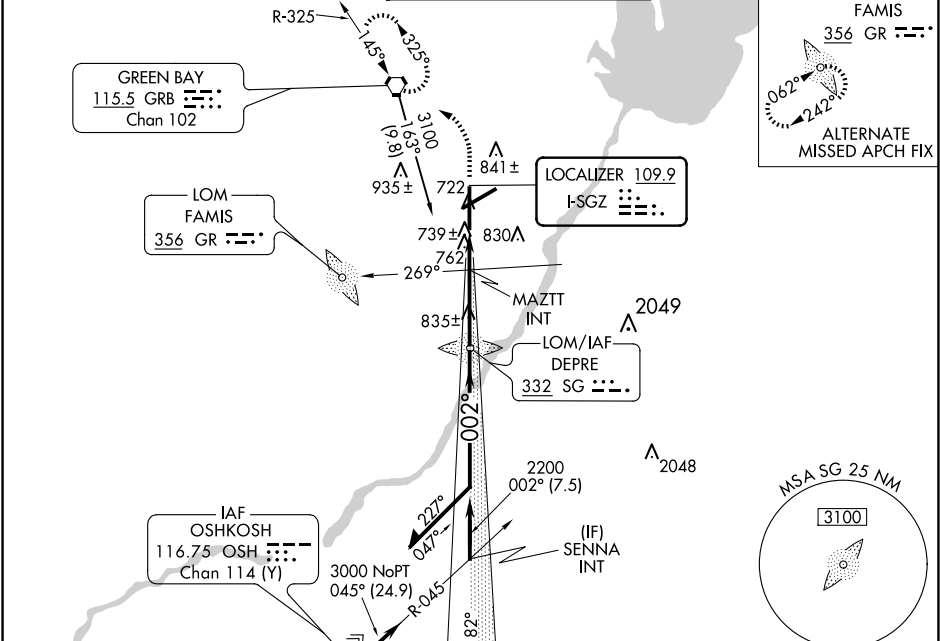

1400	2500	GRB	SG LOM	3100	2116	182°	Remain within 10 NM
*LOC only		MAZTT INT		2700	002°		GS 3.00° TCH 50
				1200	2200		
				1.5 NM	2.8 NM		
CATEGORY	A	B	C	D			
S-ILS 36	**884/24 200 (200-½)						
S-LOC 36	1200/24	516 (600-½)	1200/55	516 (600-1)			
CIRCLING	1200-1	505 (600-1)	1300-1¾ 605 (700-1¾)	1300-2 605 (700-2)			
MAZTT FIX MINIMUMS							
S-LOC 36	1020/24	336 (400-½)	1020/26	336 (400-½)			
CIRCLING	1200-1	505 (600-1)	1200-1½ 505 (600-1½)	1260-2 565 (600-2)			

EC-3, 17 APR 2025 to 15 MAY 2025

EC-3, 17 APR 2025 to 15 MAY 2025