

APP CRS	Rwy Idg	9007
020°	TDZE	2966
	Apt Elev	2977


RNAV (RNP) Y RWY 2
GLACIER PARK INTL (GPI)

RF and GPS required. Missed approach requires RNP less than 1.0.
For uncompensated Baro-VNAV systems, procedure NA below -21°C (-5°F) or above 43°C (109°F). For inoperative MALSR increase RNP 0.10* visibility to 1¼ and RNP 0.30 visibility to 2.
*Missed approach requires minimum climb of 220 feet per NM to 6100.

MALSR

MISSED APPROACH: Climb to 10000 via left turn to JOGAD, and via left turn to TONUY, and via 121° track to WILTO and via 129° track to ANGL and hold.

ATIS 132.625	SALT LAKE CENTER 127.075 244.875	GLACIER TOWER ★ 124.55 (CTAF) 0	GND CON 121.6	UNICOM 122.95
------------------------	--	---	-------------------------	-------------------------

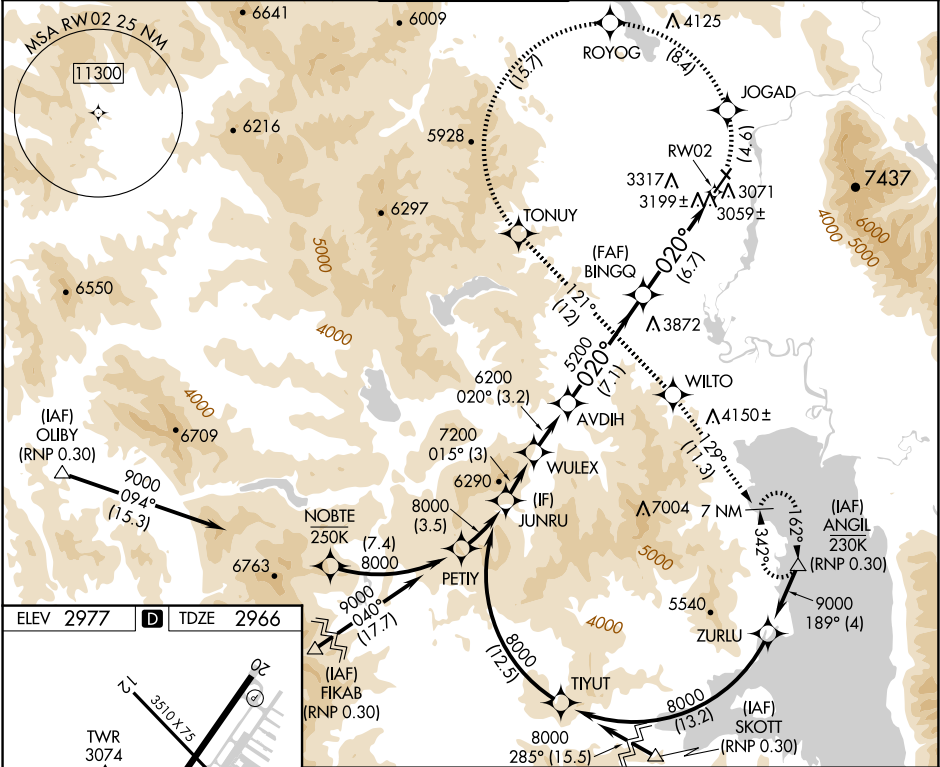

ELEV 2977 **D** TDZE 2966

REIL Rwy 20 0
MIRL Rwy 12-30 0
HIRL Rwy 2-20 0

Procedure Turn NA	JUNRU	WULEX	AVDIH	10000	JOGAD		ROYOG
GP 3.00° TCH 51				BINGQ			RW02
	3 NM	3.2 NM	7.1 NM	6.7 NM			
CATEGORY	A	B	C	D			
RNP 0.10 DA*	NA	3340-¾	374 (400-¾)				
RNP 0.30 DA	NA	3522-1½	556 (600-1½)				
AUTHORIZATION REQUIRED							