

SAN DIEGO, CALIFORNIA

25107

RNAV (GPS) RWY 24R

WAAS CH 61450 W24B	APCH CRS 243°	Rwy Idg 12,000 TDZE 475 Arprt Elev 477
--------------------------	------------------	--


[USN]

MIRAMAR MCAS (JOE FOSS FLD) (KNKX)

RNP APCH ▼ ** When ALS inop, increase vis to ¾ mile. *** When ALS inop, increase vis to 1 mile, CAT CD vis to 1¾ miles.			ALSF-1 	MISSED APPROACH: Climb to 3000 direct HOTIG, 288° track to REDIN and hold.		
ATIS ★ 352.0 133.475	SOCAL APP CON 132.2 269.1	FOSS TOWER ★ 135.2 298.925 0	GND CON 128.625 307.325	CLNC DEL 125.975 254.325	LA CENTER 291.7	ASR/ PAR

For uncompensated Baro-VNAV systems, procedure NA below -15°C (5°F) or above 54°C (130°F).

CAUTION: Intermediate deceleration segment descent gradient 309 FPM is greater than 150 FPM.

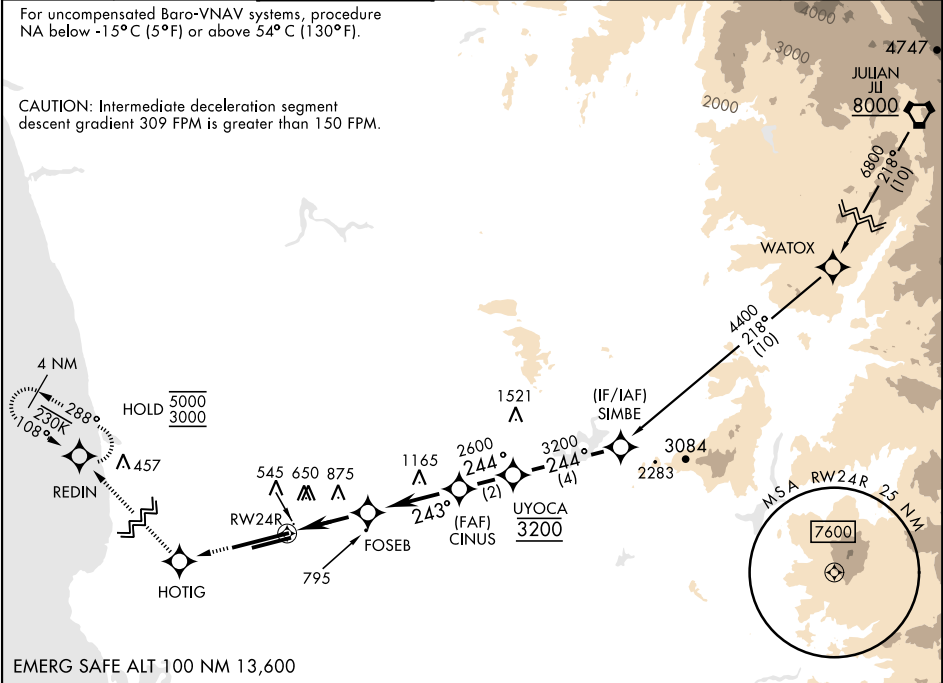

EMERG SAFE ALT 100 NM 13,600

3000	HOTIG	REDIN	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 57).		ELEV 477	TDZE 475
CATEGORY	A	B	C	D		
LPV DA *	675-½		200	(200-½)		
LNNAV/VNAV DA **	725-½		250	(300-½)		
LNNAV ***	1060-½	585 (600-½)	1060-1¼	585 (600-1¼)		
CIRCLING	1060-1	583 (600-1)	1060-1¾	583 (600-1¾)	1180-2¼	703 (800-2¼)
					HIRL Rwy 6L-24R 0	
					HIRL Rwy 6R-24L	

SAN DIEGO, CALIFORNIA

32°52'N-117°09'W

MIRAMAR MCAS (JOE FOSS FLD) (KNKX)

Amtdt 4 27JAN22

RNAV (GPS) RWY 24R

SW-3, 17 APR 2025 to 15 MAY 2025

SW-3, 17 APR 2025 to 15 MAY 2025