

RNAV (GPS) RWY 5

WAAS Chan 90095 W05A	APCH CRS 047°	Rwy Idg 12,202 TDZE 37 Arpt Elev 37
--	-------------------------	--

[USN]


BEAUFORT MCAS (MERRITT FLD) (KNBC)

RNP APCH		SALSF A2	MISSED APPROACH: Climb to 3000 direct HOWEL and hold, continue climb-in-hold to 3000.			
RADAR required						
▼ * When ALS inop, increase vis to 1 mile. ** When ALS inop, increase CAT AB vis to 1 mile, CAT CD to 1½ miles.						
ATIS ★ 279.525	APP CON 125.125 292.125 (ABV 3000) 123.7 269.125 (3000 and BLW)	TOWER ★ 119.05 342.875	GND CON 128.15 348.625	CLNC DEL 128.15 254.375	ASR/ PAR	

.164
Initial approach segment 230 KIAS max.
Intmed approach segment 210 KIAS max.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F).

CAUTION: Group 3 WCH is 18 ft;
Group 4 is 13 ft.

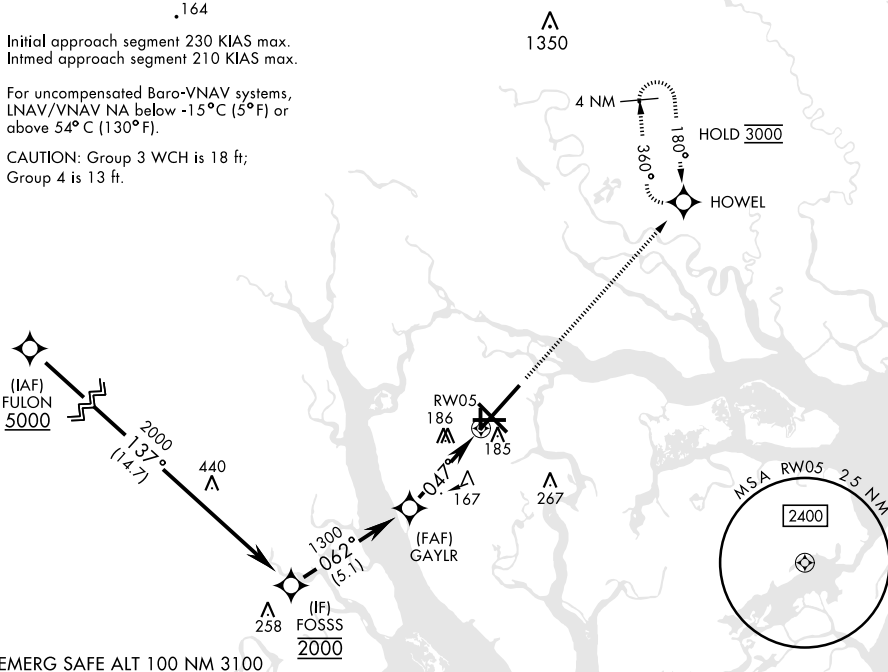

EMERG SAFE ALT 100 NM 3100

