

WAAS CH 60916 W29A	APP CRS 286°	Rwy Idg 7504 TDZE 122 Apt Elev 151
--	------------------------	---

RNAV (GPS) RWY 29
GAINESVILLE RGNL (GNV)


V DME/DME RNP-0.3 NA. For inoperative MALSR, increase LPV all Cats visibility to RVR 5000 and increase LNAV Cat D visibility to RVR 6000. For inoperative MALSR using Ocala Int-Jim Taylor Fld altimeter setting, increase LPV all Cats visibility to 1½ mile. When local altimeter setting not received, use Ocala Int-Jim Taylor Fld altimeter setting and increase LPV DA to 501 feet and all Cats visibility to RVR 5000; increase LNAV/VNAV DA to 561 feet and all Cats visibility to RVR 5000; increase all MDAs 100 feet and increase LNAV Cat C visibility to RVR 4000; increase Circling Cat C visibility ¼ SM and Circling Cat D ½ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). Baro-VNAV and VDP NA when using Ocala Int-Jim Taylor Fld altimeter setting. When VGSi inoperative, Circling Rwy 25 NA at night.

MALSR



MISSED APPROACH:
Climb to 2100 direct
LOLRY and hold.

ATIS 127.15	JACKSONVILLE APP CON 118.175 338.25	GAINESVILLE TOWER★ 119.55 (CTAF) 0 353.7	GND CON 121.7	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

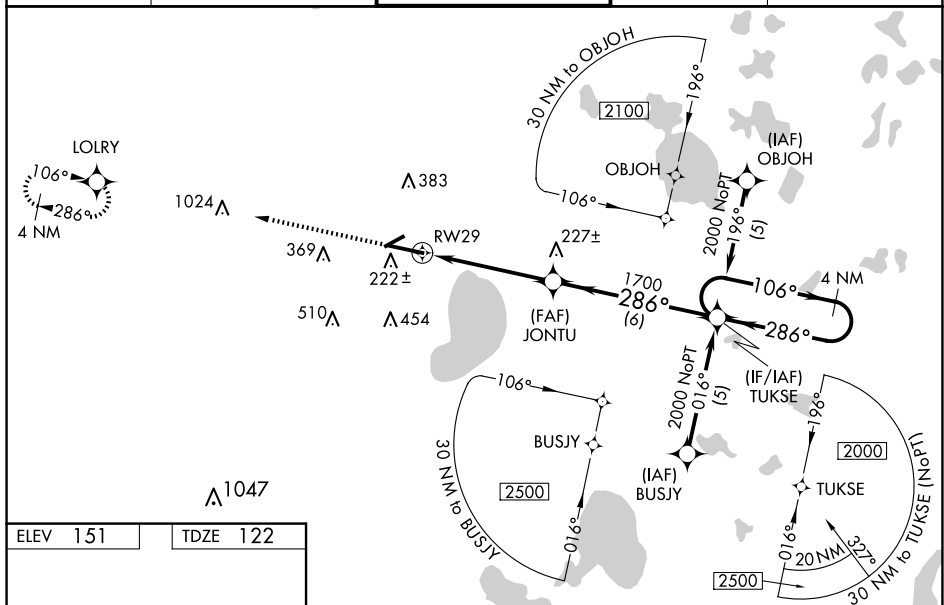

2100

LORRY

VGS and RNAV glidepath not coincident (VGS Angle 3.00/TCH 55).

TUKSE

4 NM Holding Pattern

JONTU

*LNNAV Only

*1 NM to RW29

RW29

106°

286°

1700

2000

GP 3.00° TCH 50

286°

0.6% UP

750.4 X 150

4.158 X 100

0.5% UP

TWR 202

REIL Rwy 11

MIRL Rwy 7-25

HIRL Rwy 11-29

CATEGORY	A	B	C	D
LPV DA		420/24	298 (300-½)	
LNNAV/VNAV DA		480/40	358 (400-¾)	
LNNAV MDA		500/24	378 (400-½)	500/50 378 (400-1)
CIRCLING	620-1 469 (500-1)	700-1 549 (600-1)	760-1¾ 609 (700-1¾)	820-2 669 (700-2)

GAINESVILLE, FLORIDA
Amdt 1C 20MAY21

29°41'N-82°16'W

GAINESVILLE RGNL (GNV)
RNAV (GPS) RWY 29