

WAAS CH 45815 W24A	APP CRS 243°	Rwy Idg 6547 TDZE 1156 Apt Elev 1156
--	------------------------	---

RNAV (GPS) RWY 24
FORT DODGE RGNL (FOD)


RNP APCH.

T Baro-VNAV and VDP NA when using Webster City altimeter setting. For uncompensated Baro-VNAV systems, INAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Webster City altimeter setting: increase LPV DA to 1448 feet; increase LNAV/VNAV DA to 1546 feet; increase all MDAs 60 feet and LNAV Cat C/D and Circling Cat C visibility ¼ mile.

MISSED APPROACH:
Climb to 3000 direct
GEGQI and hold.

AWOS-3PT
118.775

MINNEAPOLIS CENTER
134.0 288.3

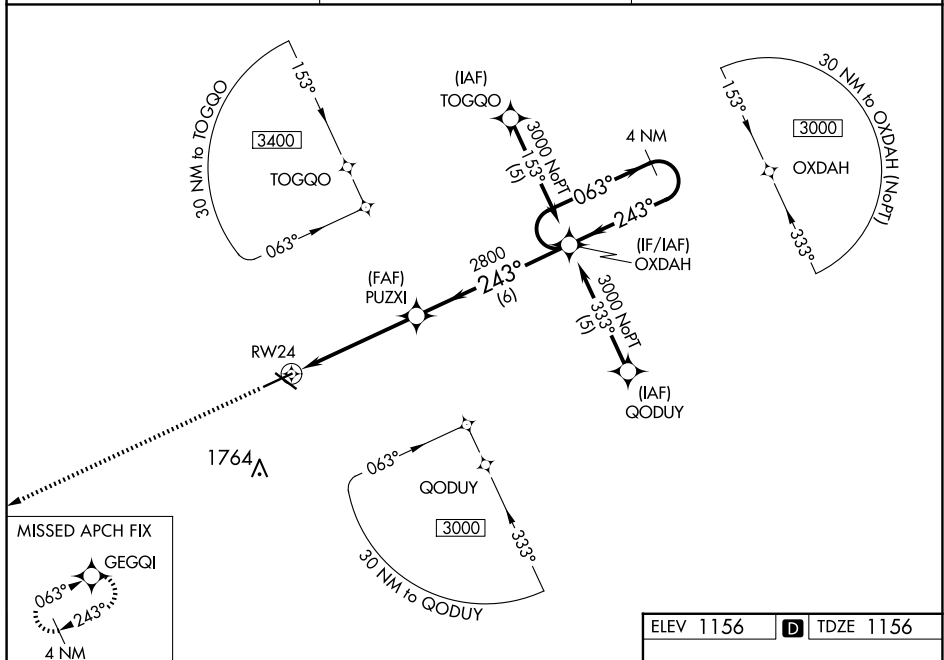UNICOM
123.0 (CTAF) **L**

3000 GEGQI VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 41).

OXDAH 4 NM Holding Pattern

*RNAV only.

PUZXI

RW24

1.1 NM to RW24

243°

2800

063°


243°

3000

GP 3.00° TCH 50

1.1 NM 3.8 NM 6 NM

CATEGORY	A	B	C	D
LPV DA	1406-1	250 (300-1)		
RNAV/VNAV DA	1504-1¼	348 (400-1¼)		
RNAV MDA	1560-1	404 (500-1)	1560-1⅛ 404 (500-1⅛)	1560-1¼ 404 (500-1¼)
CIRCLING	1560-1 404 (500-1)	1620-1 464 (500-1)	1740-1½ 584 (600-1½)	2080-3 924 (1000-3)

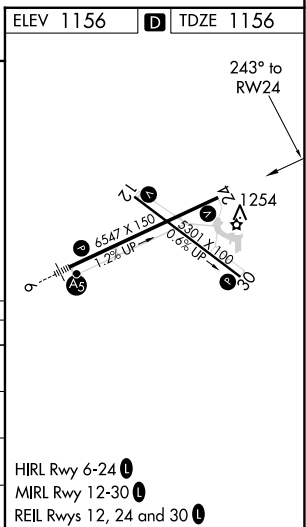

RNAV (GPS) RWY 24