

WAAS CH 62820 W05A	APP CRS 049°	Rwy Idg 5000 TDZE 48 Apt Elev 53
--	------------------------	---

RNAV (GPS) RWY 5

SALISBURY-OCEAN CITY WICOMICO RGNL (SBY)




RNP APCH.

T Baro-VNAV NA when using Georgetown altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 49°C. Visibility reduction by helicopters

A NA. When local altimeter setting not received use Georgetown altimeter setting: increase LP DA to 394 feet and increase all Cats visibility $\frac{1}{4}$ SM; increase LNAV/VNAV DA to 512 feet and all Cats visibility $\frac{1}{4}$ SM; increase all MDA 60 feet and LNAV Cat C/D and Circling Cat D visibility $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 2000 direct OKKOE and hold.

ASOS 118.325	PATUXENT APP CON ★ 127.95 314.0	SALISBURY TOWER ★ 119.425 (CTAF) 0	GND CON 123.775	CLNC DEL 123.775	CLNC DEL 132.45 (when twr closed)	UNICOM 122.95
------------------------	---	--	---------------------------	----------------------------	--	-------------------------

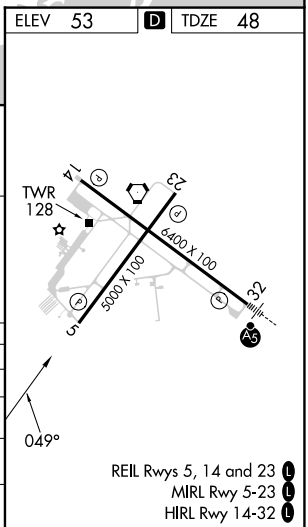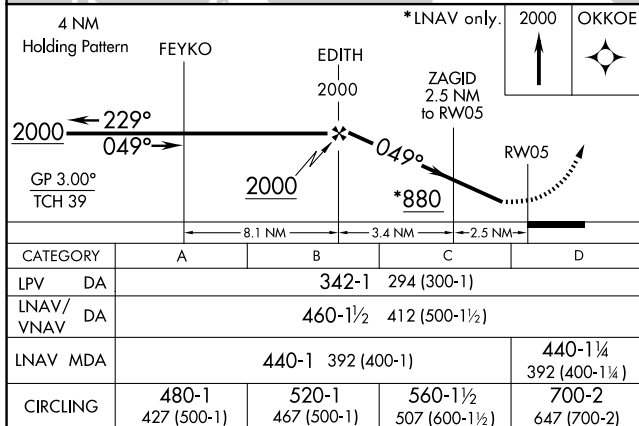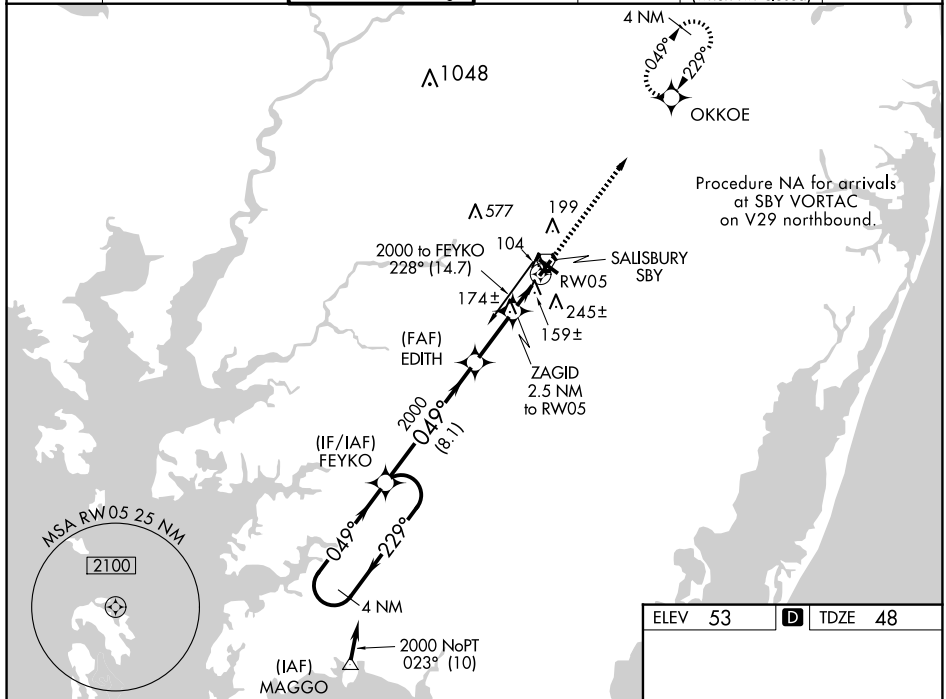

RNAV (GPS) RWY 5