

LOC I-JNK 109.1	APP CRS 319°	Rwy Idg TDZE Apt Elev 6500 937 937
---------------------------	------------------------	--

ILS or LOC RWY 32
DELAWARE COUNTY RGNL (MIE)


⚠ When control tower closed, except for operations with approved weather reporting use Fort Wayne altimeter setting. For inop MALSR when using Fort Wayne altimeter setting minimums, increase S-ILS 32 visibility to 1 SM. When local altimeter setting not received, use Fort Wayne altimeter setting: increase DA to 1257 feet and visibility all Cats ¼ SM; increase all MDAs 120 feet and visibility Cat C ¾ SM, Cat D 1 ¾ SM. VDP NA when using Fort Wayne altimeter setting.

MALSR

⚠

MISSED APPROACH: Climb to 1460 then climbing right turn to 2900 direct BALL LOM and hold.

ATIS 133.25	INDIANAPOLIS APP CON 120.65 317.8	MUNCIE TOWER ★ 120.1 (CTAF) 0	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

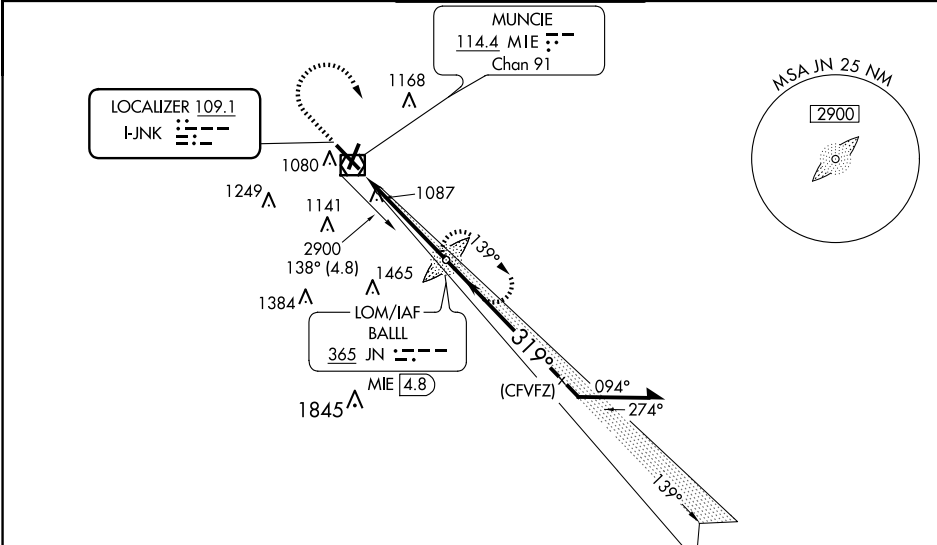

ADF or DME REQUIRED

ELEV 937 **D** TDZE 937

1460 2900 JN

*LOC only.

*MIE 1.4

2462 139° 2900 319° 2500

GS 3.00° TCH 52

1.2 3.4 NM

CATEGORY	A	B	C	D
S-ILS 32	1137-½ 200 (200-½)			
S-LOC 32	1380-½	443 (500-½)	1380-¾	443 (500-¾)
C CIRCLING	1460-1	523 (600-1)	1500-1½ 563 (600-1½)	1600-2 663 (700-2)

FORT WAYNE ALTIMETER SETTING MINIMUMS

S-ILS 32	1257-⅝ 320 (400-⅝)			
S-LOC 32	1520-½	583 (600-½)	1520-1½ 583 (600-1½)	1520-2½ 583 (600-2½)
C CIRCLING	1580-1	643 (700-1)	1600-1¾ 663 (700-1¾)	1720-2½ 783 (800-2½)

HIRL Rwy 14-32 **0**
MIRL Rwy 3-21 **0**
REIL Rws 3, 14 and 21 **0**

FAF to MAP 4.6 NM

Knots	60	90	120	150	180
Min:Sec	4:36	3:04	2:18	1:50	1:32