

LOC I-PTK <u>111.1</u>	APP CRS 095°	Rwy Idg 6520 TDZE 981 Apt Elev 981
----------------------------------	------------------------	---

ILS or LOC RWY 9R
OAKLAND COUNTY INTL (PTK)

RADAR required for procedure entry.



T Circling Rwy 9L, 36 NA at night. When local altimeter setting not received use Coleman A Young Muni altimeter setting and increase DA to 1286 feet and all MDA 120 feet, increase S-LOC 9R Cat B visibility to RVR 4000, Cat C/D visibility $\frac{3}{8}$ SM, and Circling Cat B/C/D visibility $\frac{1}{2}$ SM. For inop MALSR, increase S-LOC 9R Cat C/D visibility to $\frac{1}{4}$ SM. For inop MALSR, when using Coleman A Young altimeter, increase SLS 9R all Cats visibility to RVR 4500, and increase S-LOC 9R Cat C/D visibility to 2 SM. **RVR 1800 authorized with the use of FD or AP or HUD to DA, NA when using Coleman A Young Muni altimeter setting.

MALSR



MISSED APPROACH:
Climb to 1600 then
climbing right turn
to 3000 direct SVM
VORTAC and hold.

ATIS 125.025	DETROIT APP CON 132.35 284.0	PONTIAC TOWER★ 120.5 (CTAF) 0	GND CON 121.9	CLNC DEL 118.25	UNICOM 122.95
-----------------	---------------------------------	----------------------------------	------------------	--------------------	------------------

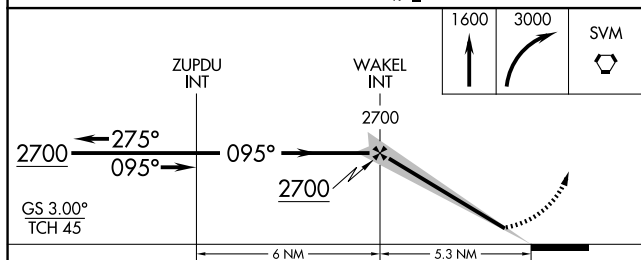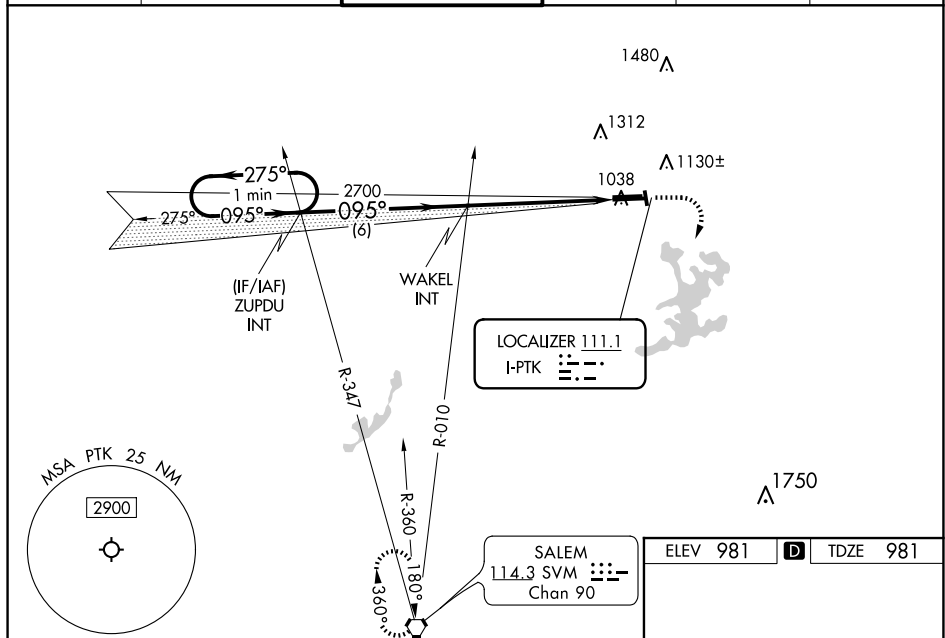

CATEGORY		A	B	C	D
S-ILS 9R		**1181/24		200 (200-½)	
S-LOC 9R		1620/24	639 (700-½)	1620-1 ³ / ₈	639 (700-1 ³ / ₈)
C CIRCLING		1620-1	639 (700-1)	1640-1 ³ / ₄ 659 (700-1 ³ / ₄)	1640-2 659 (700-2)