

WAAS CH 93511 W02A	APP CRS 023°	Rwy Idg 6005 TDZE 433 Apt Elev 433
--	------------------------	---

RNAV (GPS) RWY 2

JACKSON RGNL (MKL)

RNP APCH - GPS.

▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C.
For inop ALS, increase visibility LNAV Cats A/B to 1 SM, and Cats C/D to 1 ½ SM.

MALSR

MISSED APPROACH:
Climb to 3000 direct GARTZ and hold.

ASOS 119.325	MEMPHIS CENTER 134.65 316.15	JACKSON TOWER ★ 127.15 (CTAF) 0 249.95	GND CON 120.9	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------

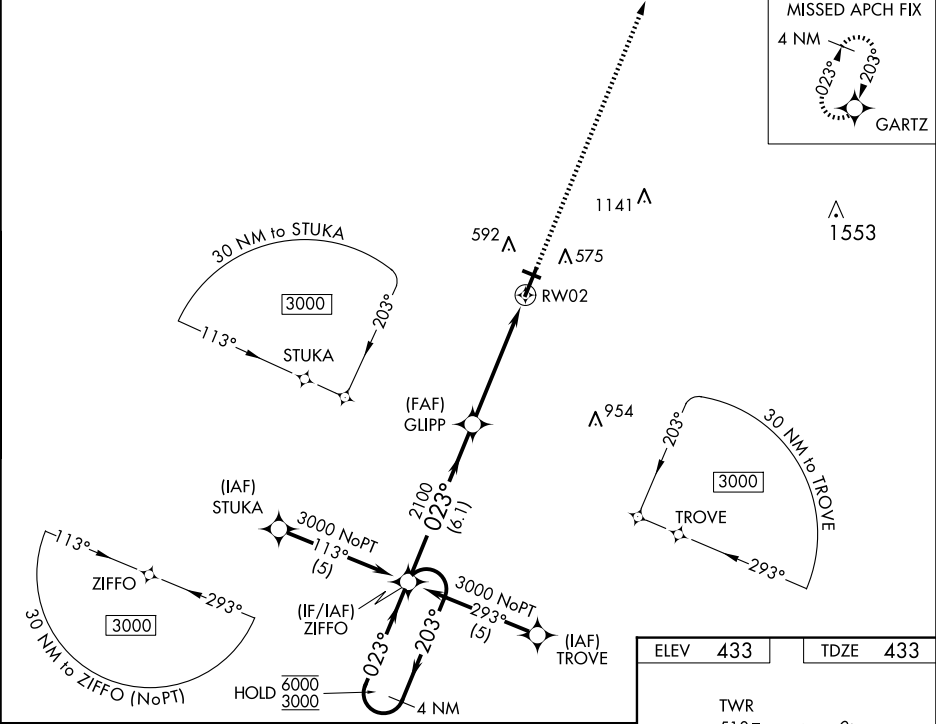

4 NM Holding Pattern ZIFFO		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 29).		3000	GARTZ
6000	3000	203°	023°	GLIPP	1.4 NM to RW02
GP 3.04° TCH 59		2100	203°	2100	RW02
		6.1 NM	3.6 NM	1.4 NM	
CATEGORY	A	B	C	D	
LPV DA	772-¾		339 (400-¾)		
LNAV/VNAV DA	886-⅞		453 (500-⅞)		
LNAV MDA	900-¾ 467 (500-¾)		900-1 467 (500-1)		
CIRCLING	900-1 467 (500-1)		920-1 487 (500-1)		
			960-1½ 527 (600-1½)		
			1080-2 647 (700-2)		

