

WAAS CH 53706 W13A	APP CRS 133°	Rwy Idg 7400 TDZE 1184 Apt Elev 1182
--	------------------------	---

RNAV (GPS) RWY 13

FALLS INTL/EINARSON FLD (INTL)




When local altimeter setting not received, use Baudette altimeter setting: increase LPV DA to 1561 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 1796 feet and visibility all Cats ¾ SM; increase all MDAs 140 feet and visibility LNAV Cat C and D and Circling Cat C and D ½ SM. For inop MALS R when using Baudette altimeter setting, increase LPV visibility ½ mile all Cats, inop table does not apply to LNAV/VNAV. VDP NA when using Baudette altimeter setting. Baro-VNAV NA when using Baudette altimeter setting. Circling to Rwy 4-22 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 47°C (116°F). DME/DME RNP-0.3 NA.

MALS R



MISSED APPROACH:
Climb to 3400 direct ZAVBA and hold.

ASOS 120.0	MINNEAPOLIS CENTER 120.9 377.1	UNICOM 122.8 (CTAF)
----------------------	--	-------------------------------

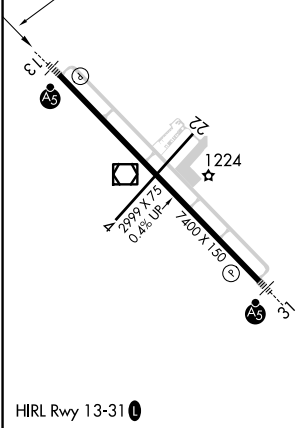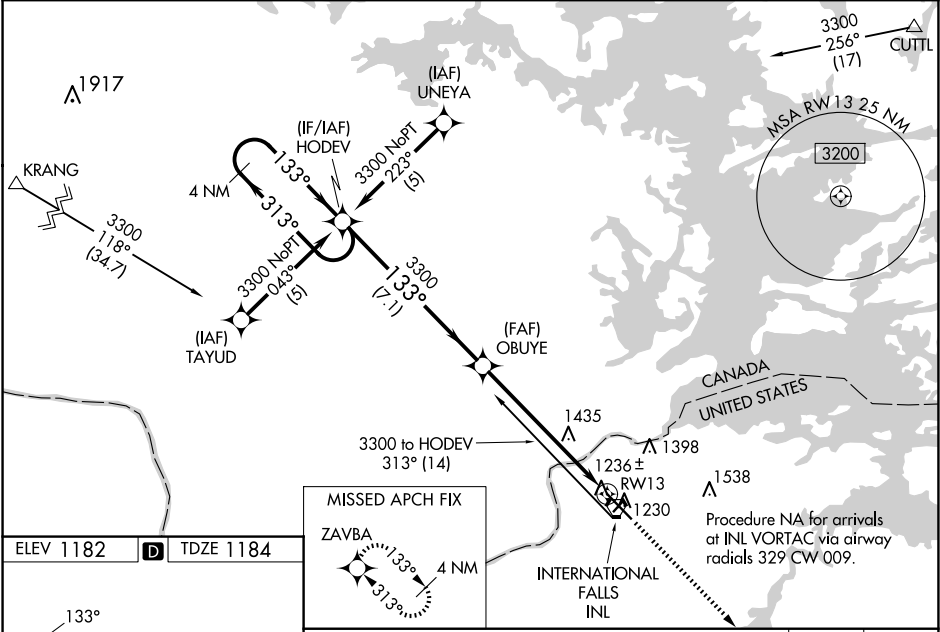

4 NM Holding Pattern		HODEV	OBUYE	3400	ZAVBA
3300 ← 313°		133° →	3300	*1.6 NM to RW13	*LNAV only.
GP 3.00°		TCH 50			
		7.1 NM	4.8 NM	1.6	
CATEGORY	A	B	C	D	
LPV DA	1434-½		250 (300-½)		
LNAV/VNAV DA	1669-1¼		485 (500-1¼)		
LNAV MDA	1760-½	576 (600-½)	1760-1 576 (600-1)	1760-1¼ 576 (600-1¼)	
CIRCLING	1760-1	578 (600-1)	1900-2 718 (800-2)	1900-2¼ 718 (800-2¼)	