

WAAS CH 61012 W18A	APP CRS 177°	Rwy Idg 6203 TDZE 1016 Apt Elev 1016
--	------------------------	---



RNAV (GPS) RWY 18
ADARRGNL (ADH)

▼ Inop table does not apply to LPV. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Seminalometer altimeter setting. Circling Rwy 31 NA at night. Rwy 18 helicopter visibility reduction below ¼ SM NA. DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV Cts A and B visibility ½ SM. For inop ALS when using Seminalometer altimeter setting, increase LPV all Cts visibility to 1 SM and LNAV/VNAV all Cts to 1¼ SM. When local altimeter setting not received, use Seminalometer altimeter setting: increase LPV DA to 1332 feet, LNAV/VNAV DA to 1386 and all MDA 80 feet. Increase LPV all Cts visibility ½ SM, increase LNAV/VNAV all Cts and LNAV Cat C and D visibility ¼ SM. Increase Circling Cts C/D visibility ½ SM.

ODALS


MISSED APPROACH:
Climb to 3000 direct
TANPY and hold.

AWOS-3PT 118.725	FORT WORTH CENTER 132.2 338.35	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

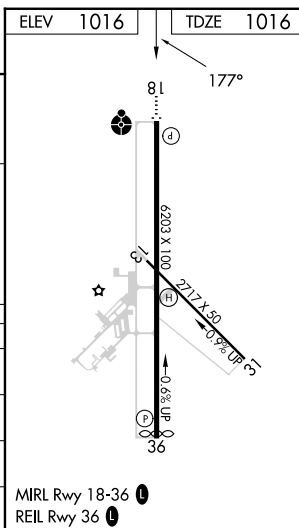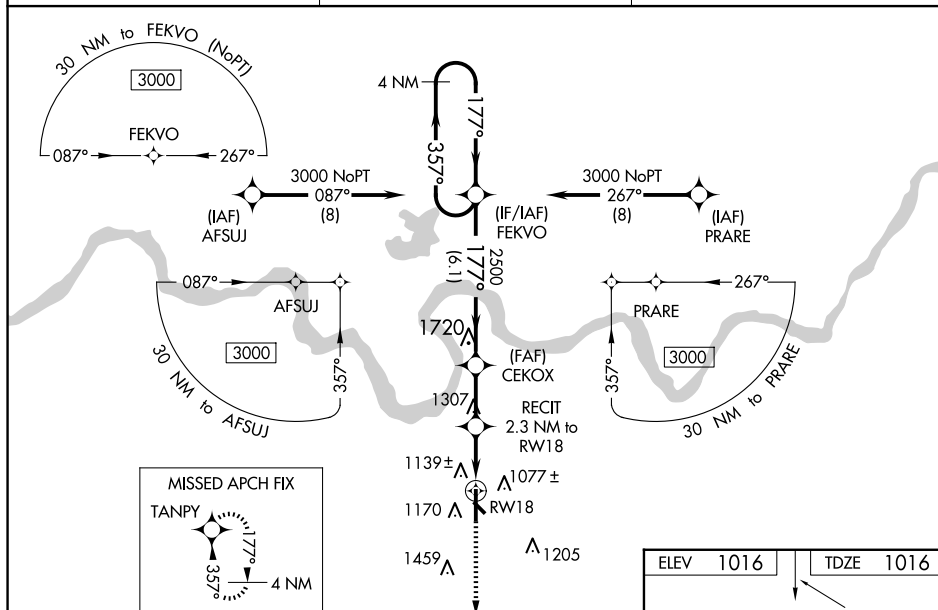

RNAV (GPS) RWY 18