

VOR/DME GFK 114.3 Chan 90	APP CRS 344°	Rwy Idg 7351 TDZE 845 Apt Elev 845
---	------------------------	---

VOR RWY 35L
GRAND FORKS INTL (GFK)


When local altimeter setting not received, use Crockston altimeter setting and increase all MDA 80 feet; increase Cat C/D visibility to 1¼ SM and Circling Cat C visibility ¼ SM. Increase ELVAV fix minimums Cat C/D visibility to RVR 4500 and Circling Cat C visibility ¼ SM. For inop ALS, increase S-35L Cat C/D visibility to 1¾ SM. ELVAV fix minimums: For inop ALS, increase S-35L Cat C/D visibility to RVR 5500.

MALSR



MISSED APPROACH: Climb to 1300 then climb to 3600 on GFK R-360 then right turn direct GFK VOR/DME and hold.

ATIS 119.4	GRAND FORKS APP CON ★ 118.1 318.1	GRAND FORKS TOWER★ 118.4(CTAF) 350.35	GND CON 124.575	CLNC DEL 135.725	UNICOM 122.95
----------------------	---	---	---------------------------	----------------------------	-------------------------

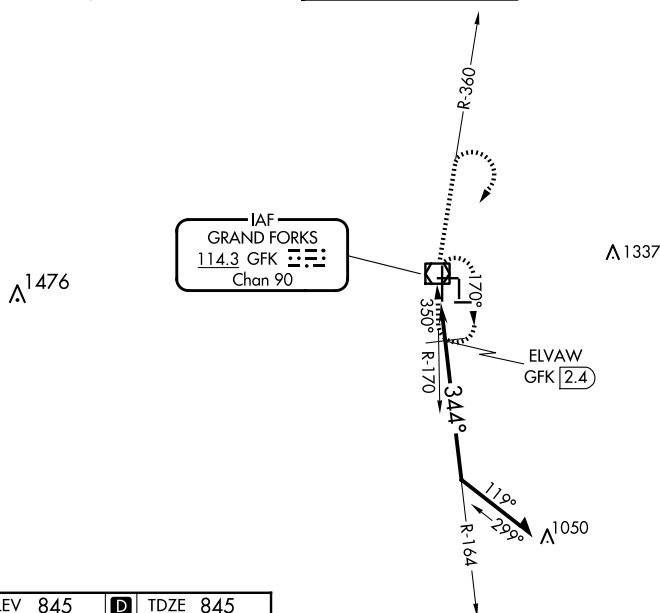

MSA GFK 25 NM

130°


3300

2700

040°

ELEV 845	D	TDZE 845
----------	----------	----------

MIRL Rwy 9L-27R **(L)**
MIRL Rwys 9R-27L and 17L-35R
HIRL Rwy 17R-35L **(L)**
REIL Rwys 17R, 9L, and 27R **(L)**



CATEGORY	A	B	C	D
S-35L	1360/24 515 (600-½)	1360/55 515 (600-1)	1400-1½ 555 (600-1½)	1420-2 575 (600-2)
C CIRCLING	1360-1 515 (600-1)	1400-1½ 555 (600-1½)	1420-2 575 (600-2)	

ELVAW FIX MINIMUMS

CATEGORY	A	B	C	D
S-35L	1220/24 375 (400-½)	1220/40 375 (400-¾)	1260-1 415 (500-1)	1300-1 455 (500-1)
C CIRCLING	1260-1 415 (500-1)	1300-1 455 (500-1)	1400-1½ 555 (600-1½)	1420-2 575 (600-2)