

LOC I-IWD 111.5	APP CRS 270°	Rwy ldg 6501 TDZE 1230 Apt Elev 1230	ILS or LOC RWY 27 GOGEBIC/IRON COUNTY (IWD)
---------------------------	------------------------	---	--

▼

▲ NA


⚙ -27°C

When local altimeter setting not received, use ASX altimeter setting: increase DA to 1562 feet; increase all MDAs 140 feet and S-LOC 27 visibility Cats C and D ½ SM and Circling visibility Cat B ¼ SM. For inop ALS when using ASX altimeter setting, increase S-ILS 27 all Cats visibility to 1 SM.

MALSR
A5

MISSED APPROACH:
Climb to 3300 then right turn direct IWD VOR/DME and hold.

AWOS-3PT 125.175	MINNEAPOLIS CENTER 133.55	UNICOM 122.8 (CTAF) 1
----------------------------	-------------------------------------	---------------------------------

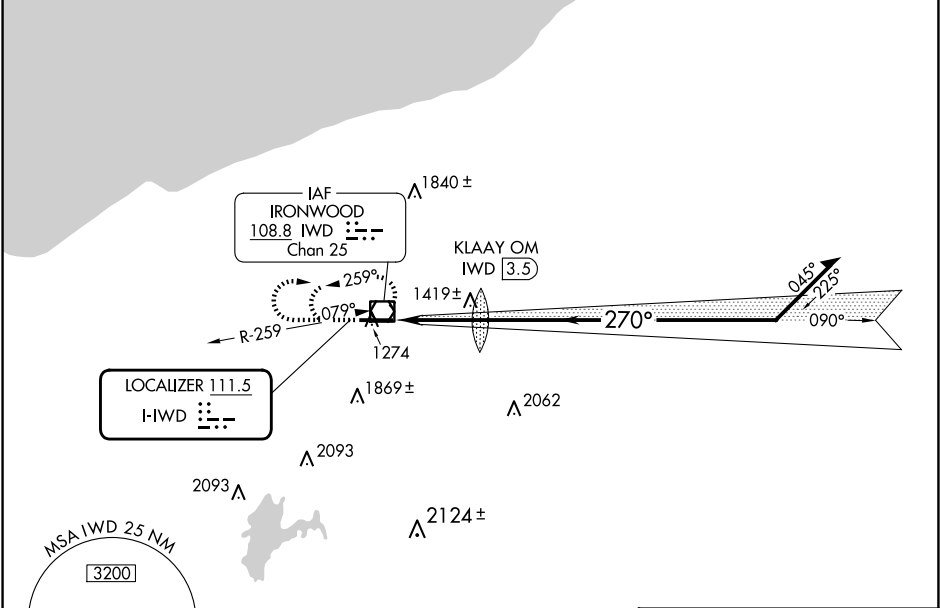

ELEV 1230 D TDZE 1230

3300

↑

IWD

3300

090°

IWD VOR/DME

Remain within 15 NM of IWD VOR/DME

KLAAY OM IWD 3.5

2311

270°

3300

2800

2500*

*LOC only

GS 3.00°

TCH 55

3.2 NM

CATEGORY	A	B	C	D
S-ILS 27	1430-½		200 (200-½)	
S-LOC 27	1720-½	490 (500-½)	1720-1	490 (500-1)
CIRCLING	2100-1¼	870 (900-1¼)	2200-3 970 (1000-3)	2220-3 990 (1000-3)

REIL Rwy 9 1
HIRL Rwy 9-27 1
FAF to MAP 3.2 NM
Knots 60 90 120 150 180
Min:Sec 3:12 2:08 1:36 1:17 1:04

EC-1, 17 APR 2025 to 15 MAY 2025

EC-1, 17 APR 2025 to 15 MAY 2025