


LOC/DME I-BQG	APP CRS	Rwy Idg	6997
110.7	144°	TDZE	22
Chan 44		Apt Elev	22

LOC RWY 15
MARTIN STATE (MTN)


When local altimeter setting not received, use Baltimore/Washington Intl Thurgood Marshall altimeter setting; increase all MDA 60 feet and increase S-15 Cat A and Circling Cats C and D visibility ¼ SM and increase JIVMI fix minimums S-15 Cats C and D visibility ½ SM and Circling Cat C and D visibility ¼ SM. Rwy 15 helicopter visibility reduction below ¾ SM NA. Circling Cat D NA northeast of Rwy 15-33.

MISSED APPROACH: Climbing right turn to 3000 on heading 312° and BAL VORTAC R-015 to MEHAN INT/I-BQG 14.3 DME and hold.

ATIS 124.925	POTOMAC APP CON 119.0 282.275	MARTIN TOWER ★ 121.3(CTAF) 0 254.425	GND CON 121.8 253.4	UNICOM 122.95
-----------------	----------------------------------	---	------------------------	------------------

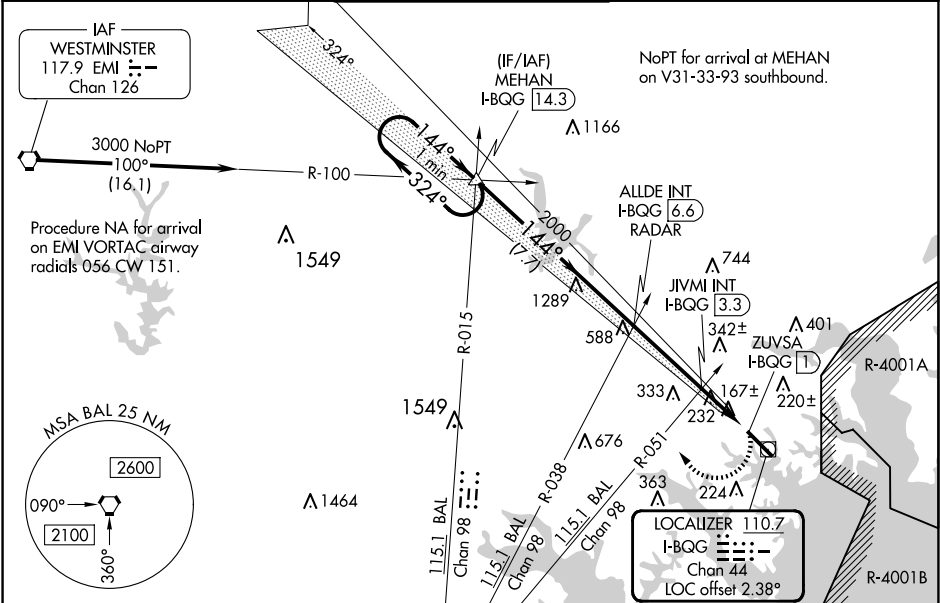

*920 when using Baltimore/Washington Intl Thurgood Marshall altimeter setting.

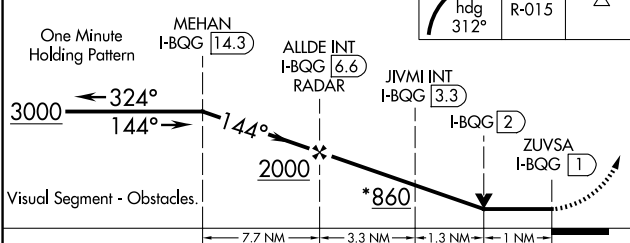

CATEGORY	A	B	C	D
S-15	860-1 838 (900-1)	860-1¼ 838 (900-1¼)	860-2½ 838 (900-2½)	
CIRCLING	860-1¼ 838 (900-1¼)		860-2½ 838 (900-2½)	860-2¾ 838 (900-2¾)
JIVMI FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-15	500-1 478 (500-1)		500-1¾ 478 (500-1¾)	
CIRCLING	560-1 538 (600-1)		680-1¾ 658 (700-1¾)	740-2¼ 718 (800-2¼)

ELEV 22	TDZE 22
HIRL Rwy 15-33 REIL Rws 15 and 33	
Rwy 33 Idg 8100' (Military Operations Only) Rwy 15 take-off 8100' (Military Operations Only)	
FAF to MAP 5.6 NM	
Knots	60 90 120 150 180
Min:Sec	5:36 3:44 2:48 2:14 1:52

NE-3, 17 APR 2025 to 15 MAY 2025

NE-3, 17 APR 2025 to 15 MAY 2025