

WAAS CH 69316 W17A	APP CRS 180°	Rwy Idg TDZE Apt Elev	6003 213 213
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 17

WEST MEMPHIS MUNI (A WM)

RNP APCH.


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). When local altimeter setting not received, use Memphis Intl altimeter setting and increase LPV DA to 513 feet, LNAV/VNAV DA to 644 feet and all visibilities ¼ SM; increase all MDAs 60 feet and increase visibility LNAV Cat C and Circling Cat C and D ¼ SM. Baro-VNAV and VDP NA when using Memphis Intl altimeter setting.

MALSRR

MISSED APPROACH: Climb to 2100 direct USUPE and hold.

ASOS 118.175	MEMPHIS APP CON 119.1 291.6	CLNC DEL 121.7	UNICOM 123.05 (CTAF) 0
------------------------	---------------------------------------	--------------------------	---

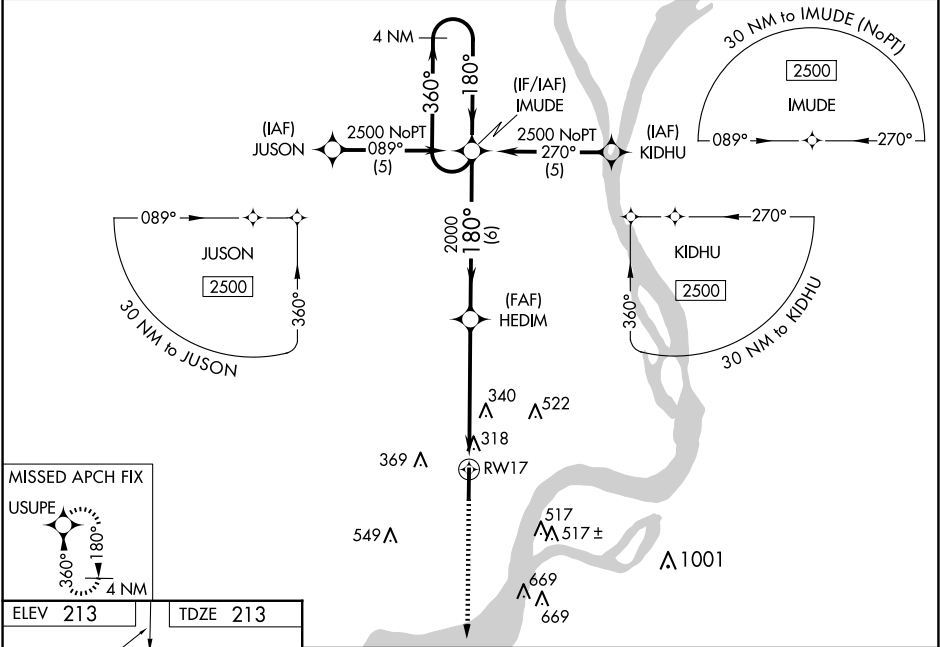

ELEV 213	TDZE 213	2100	USUPE	IMUDE	4 NM Holding Pattern
*LNAV only.					
*1 NM to RWY 17					
RWY 17					
HEDIM					
2000					
2500					
GP 3.00° TCH 51					
1 4.4 NM 6 NM					
CATEGORY	A	B	C	D	
LPV DA	463-½		250 (300-½)		
LNAV/VNAV DA	594-¾		381 (400-¾)		
LNAV MDA	600-½ 387 (400-½)		600-⅝ 387 (400-⅝)		600-1 387 (400-1)
CIRCLING	640-1 427 (500-1)		740-1 527 (600-1)		800-1½ 587 (600-1½) 920-2¼ 707 (800-2¼)