

WAAS

CH 53599

W36A

APP CRS

002°

Rwy Idg

7000

TDZE

922

Apt Elev

922

RNAV (GPS) RWY 36

INDIANAPOLIS EXEC (TYQ)

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct SICL and hold.

AWOS-3PT 120.725	INDIANAPOLIS APP CON 124.65 127.15 317.8	CLNC DEL 118.175	UNICOM 123.05 (CTAF) 1
---------------------	---	---------------------	---------------------------

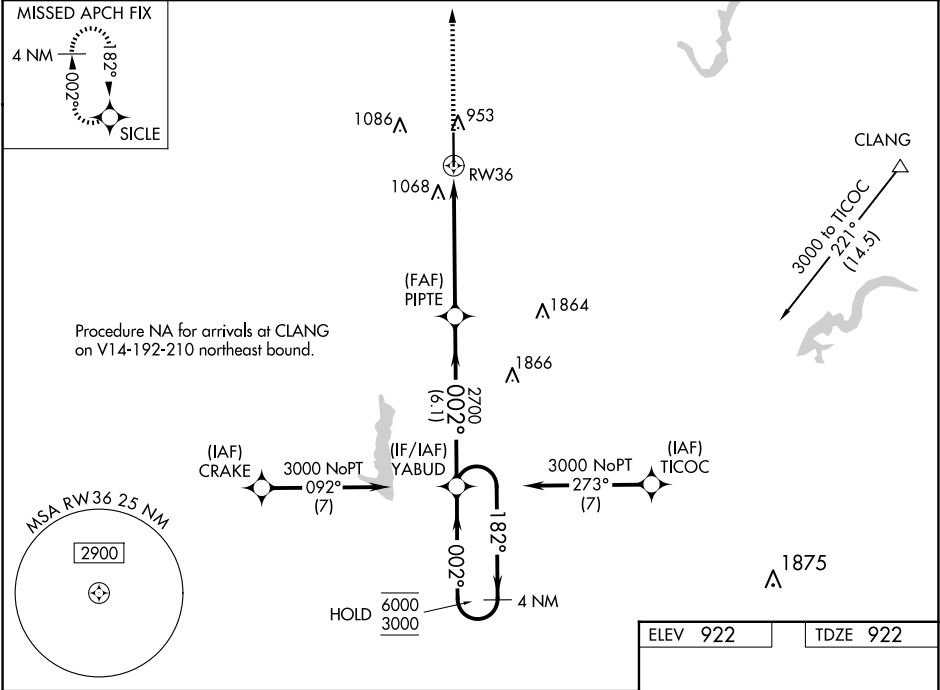

3000		SICL				
RW36		1.3 NM to RW36	PIPTE	YABUD	4 NM Holding Pattern	
1.3		4.2 NM	6.1 NM			
CATEGORY	A	B	C	D		
LPV DA	1172-3/4		250 (300-3/4)			
LNAV/VNAV DA	1351-1 1/4		429 (500-1 1/4)			
LNAV MDA	1380-1	458 (500-1)	1380-1 3/8	458 (500-1 3/8)		
CIRCLING	1400-1	478 (500-1)	1440-1 1/2	1480-2		
			518 (600-1 1/2)	558 (600-2)		
					HIRL Rwy 18-36 1 REIL Rwy 18 and 36 1	