

WAAS CH 97599 W15A	APP CRS 149°	Rwy Idg 10000 TDZE 95 Apt Elev 96
--	------------------------	--

RNAV (GPS) RWY 15R

GEORGE BUSH INTCNL/HOUSTON (IAH)

RADAR required for procedure entry.
RNP APCH.


T

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 5500, and LNAV Cat C/D/E visibility to 1 3⁄8 SM.

MALSR

MISSED APPROACH: Climb to 2000 direct JINIP and left turn on track 079° to COSBI and hold.

D-ATIS 124.05	HOUSTON APP CON 120.05 379.1 EAST 124.35 316.15 WEST	HOUSTON TOWER 127.3 288.25	GND CON 121.7	CLNC DEL 128.1	CPDLC
-------------------------	--	--------------------------------------	-------------------------	--------------------------	-------

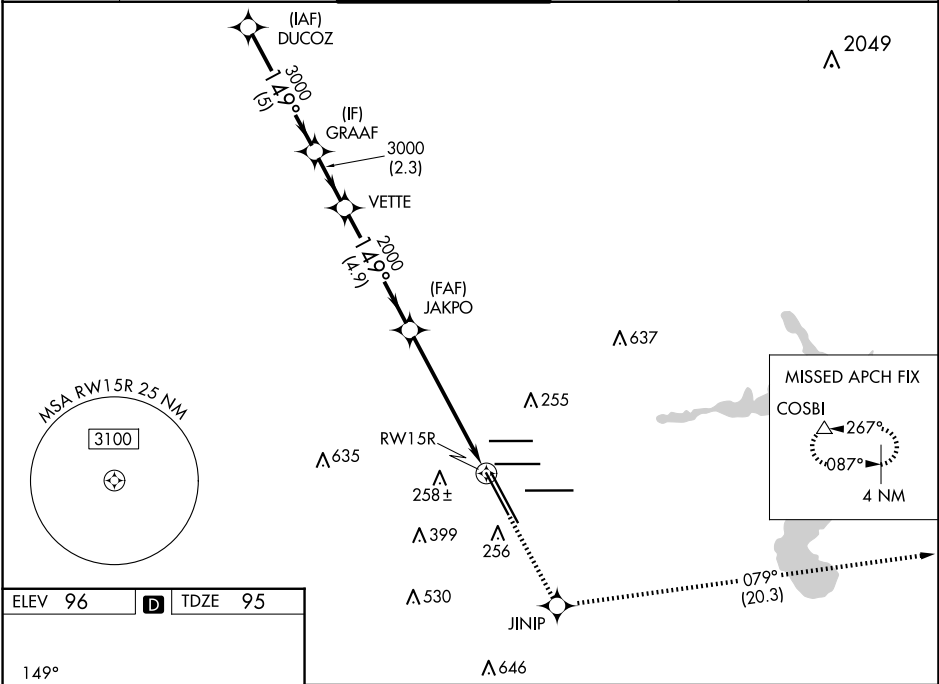

ELEV 96

D

TDZE 95

149°

9000 X 150

26R

26L

27

33L

33R

TWR 422

10000 X 150

1200 X 80

TDZ/CL Rwy 8R, 8L, 15R, 26R, 26L, 27 and 33L

HIRL all Rwy

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).					
DUCOZ GRAAF VETTE JAKPO COSBI					
3000 — 149° — 3000 3000 2000 *1.3 NM to RWY 15R RWY 15R					
GP 3.00° TCH 54					
5 NM 2.3 NM 4.9 NM 4.5 NM 1.3 NM					
CATEGORY	A	B	C	D	E
LPV DA	295/18		200 (200-½)		
LNAV/VNAV DA	460/35		365 (400-¾)		
LNAV MDA	580/24	485 (500-½)	580/50		485 (500-1)

SC-5, 17 APR 2025 to 15 MAY 2025

SC-5, 17 APR 2025 to 15 MAY 2025