

WAAS CH 57902 W33A	APP CRS 329°	Rwy 33R Rwy Idg 12001 TDZE 89 Apt Elev 96	Rwy 33L Rwy Idg 10000 TDZE 90 Apt Elev 96
--	------------------------	---	---

RNAV (GPS) RWY 33R


GEORGE BUSH INTCNL/HOUSTON (IAH)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C (27°F) or above 54°C (130°F). For inop MALSR, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to 1½, and LNAV Cat E visibility to 1½. DME/DME RNP-0.3 NA. ** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 2000 direct NALIE and on track 333° to GOMER and hold.

D-ATIS 124.05	HOUSTON APP CON 120.05 379.1 EAST 124.35 316.15 WEST	HOUSTON TOWER 127.3 288.25	GND CON 121.7	CLNC DEL 128.1	CPDLC
-------------------------	--	--------------------------------------	-------------------------	--------------------------	-------

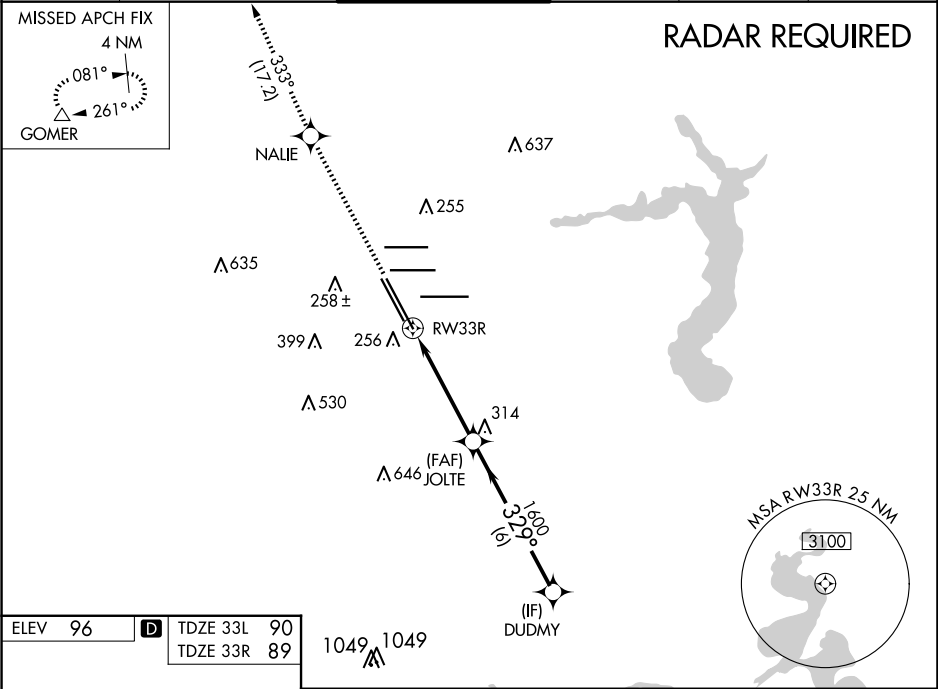

ELEV 96	D	TDZE 33L 90
		TDZE 33R 89

2000

NALIE

tr 333°

GOMER

JOLTE

DUDMY

*LNAV only.

RW33R

1.3 NM to RW33R

1.600

329°

2000

GP 3.00°

TCH 49

CATEGORY	A	B	C	D	E
LPV DA**	289/24		200 (200-½)		
LNAV/VNAV DA	490/45		401 (400-7%)		
LNAV MDA	540/24	451 (500-½)	540/45 451 (500-7%)		
SIDESTEP 33L	540-1	450 (500-1)	540-1½ 450 (500-1½)	540-2 450 (500-2)	NA

TDZ/CL Rwy 8, 8L, 15R, 26R, 26L, 27 and 33L
HIRL all Rwy 33R

