

APP CRS	Rwy Idg	10000
087°	TDZE	91
	Apt Elev	96

RNAV (RNP) Y RWY 9

GEORGE BUSH INTCNL/HOUSTON (IAH)



For uncompensated Baro-VNAV systems, procedure NA below -3°C (27°F) or above 54°C (130°F). GPS required. For inop MALSR, increase all Cats visibility to 1½ mile. Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR



MISSED APPROACH: Climb to 580 then climbing right turn to 3000 direct JEBX and hold.

D-ATIS
124 05

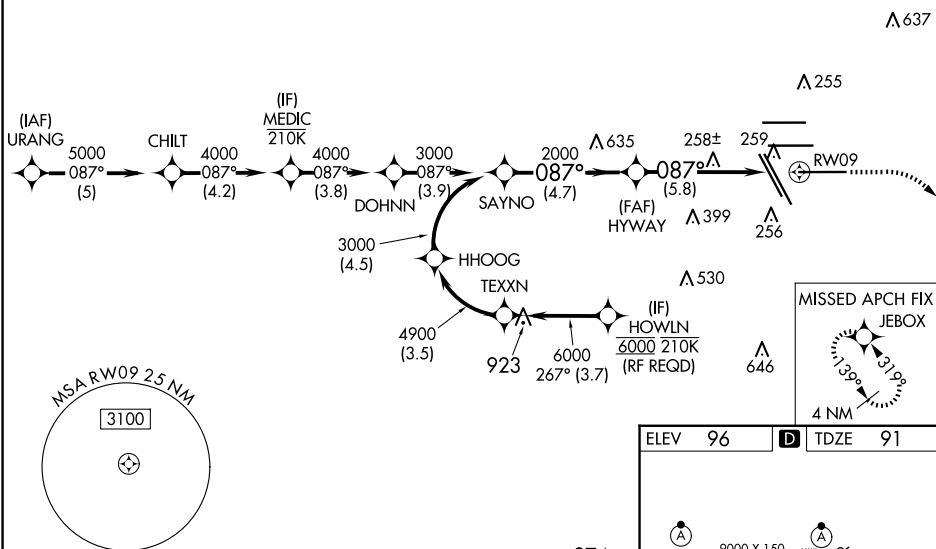
HOUSTON APP CON
120.05 379.1 EAST
124.35 316.15 WEST

HOUSTON TOWER
135 15 290 2

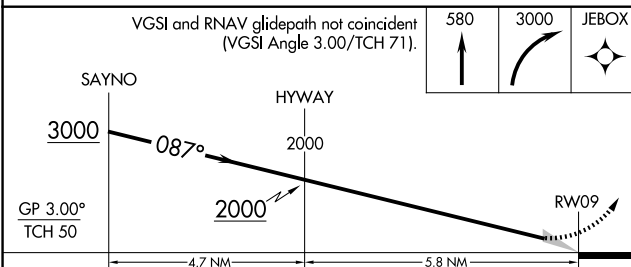
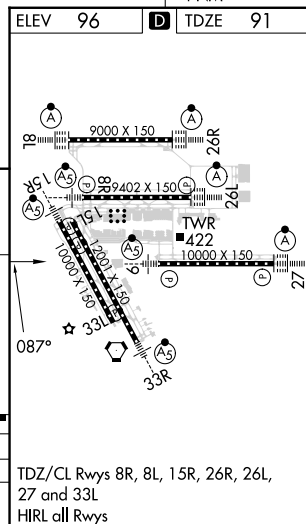
GND CON
118 575

CLNC DEL
128 1

CPDLC



VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 71).

974 

CATEGORY	A	B	C	D
RNP 0.30 DA	516/49 425 (500-1)			