

WAAS CH 48922 W19A	APP CRS 186°	Rwy Idg 6503 TDZE 320 Apt Elev 346
--	------------------------	---

RNAV (GPS) RWY 19

EVERETT-STEWART RGNL (UCY)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA with Dyersburg altimeter setting. When local altimeter setting not received, use Dyersburg altimeter setting and increase all DA 72 feet and all MDA 80 feet, increase LPV all Cats visibility ¼ SM, LNAV/VNAV all Cats visibility ¼ SM, LNAV Cats C/D visibility ⅓ SM, and Circling Cat D visibility ¼ SM.

MISSED APPROACH:
Climb to 2300 direct
GIYEV and hold.

AWOS-3 135.325	MEMPHIS CENTER 133.65 292.15	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------------

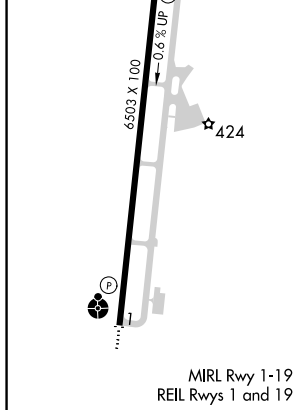
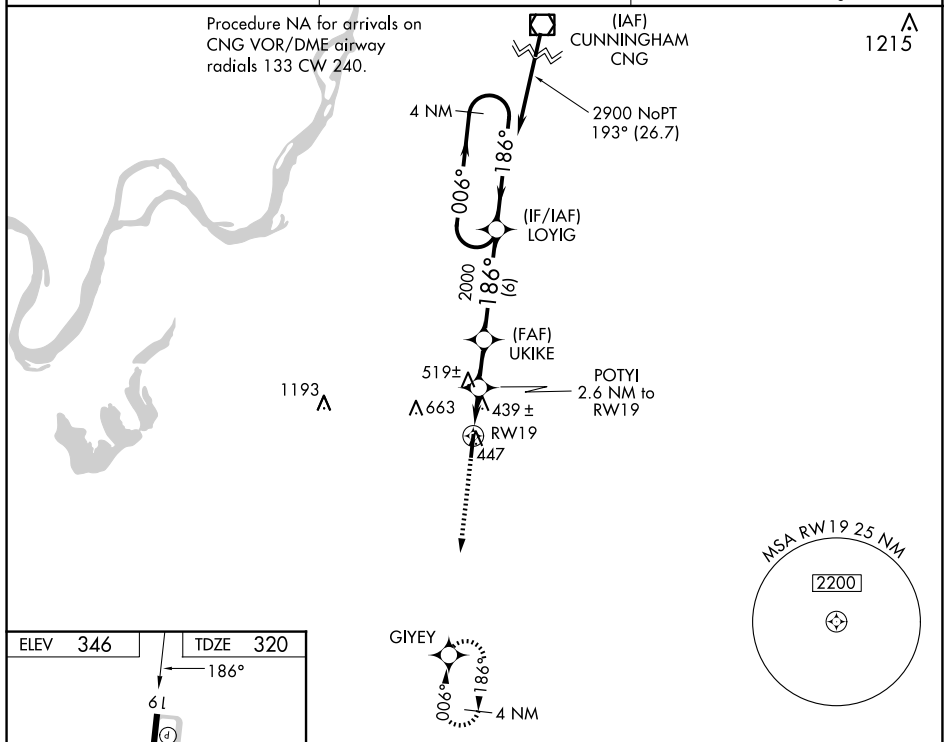


Diagram illustrating a 4 NM Holding Pattern for the GIYEG VOR/DME station. The pattern is defined by a 186° heading. The inbound leg is 1.1 NM to RW19, and the outbound leg is 2.6 NM to POTYI. The pattern is defined by a 186° heading. The diagram also shows the VGSB and RNAV glidepath not coincident (VGSB Angle 3.00/TCH 29).