


WAAS CH 42636 W30A	APP CRS 306°	Rwy Idg 4000 TDZE 543 Apt Elev 547
--	------------------------	---

RNAV (GPS) RWY 30
MUSCATINE MUNI (MUT)

⚠ DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. VDP and Baro-VNAV NA with Iowa City altimeter setting. When local altimeter setting not received, use Iowa City altimeter setting and increase all DA 76 feet and all MDA 80 feet, increase LNAV/VNAV all Cats visibility ¼ mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F).

MISSED APPROACH: Climb to 2600 direct YEBTY and hold.

AWOS-3P 120.625	QUAD CITY APP CON * 133.275 257.8	CLNC DEL 119.125	UNICOM 122.7 (CTAF) 0
---------------------------	---	----------------------------	---------------------------------

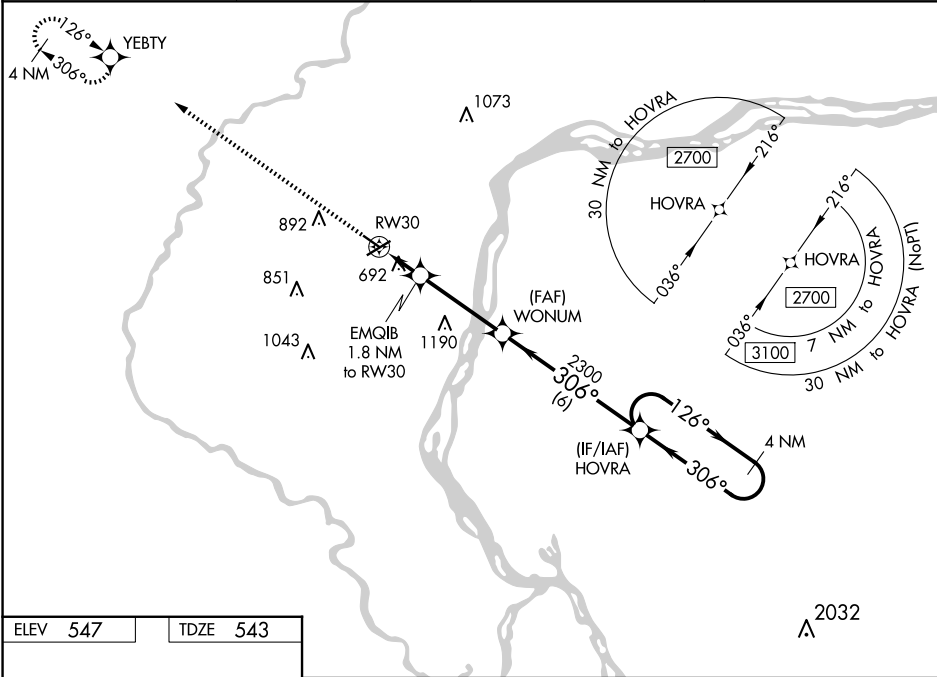

ELEV 547 TDZE 543

2600 YEBTY

EMQIB 1.8 NM to RWY 30

WONUM 2300

HOVRA 4 NM Holding Pattern

126° 2700

306° 2300

GP 3.00° TCH 40

1.2 NM 0.6 3.6 NM 6 NM

CATEGORY	A	B	C	D
LPV DA	743-1	200 (200-1)	NA	
LNAV/VNAV DA	989-1½	446 (500-1½)	NA	
LNAV MDA	960-1	417 (500-1)	NA	
C CIRCLING	1000-1 453 (500-1)	1200-1 653 (700-1)	NA	