


24249

ILS or LOC RWY 15
SULLIVAN COUNTY INTL (MSV)

A VDP NA when using New York Stewart Intl altimeter setting. When local altimeter setting not received, use New York Stewart Intl altimeter setting; increase S-ILS 15 DA to 1858 feet and all visibilities $\frac{1}{2}$ SM; increase all MDAs 220 feet and S-LOC 15 visibility Cat B, C and D $\frac{1}{2}$ SM, and Circling Cat B, C and D visibilities $\frac{1}{2}$ SM.

MISSED APPROACH: Climb to 3300 direct MUMVE and hold.

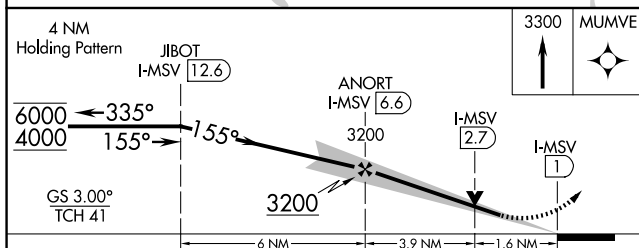

CATEGORY	A	B	C	D
S-ILS 15	1653- $\frac{3}{4}$		250 (300- $\frac{3}{4}$)	
S-LOC 15	1960-1	557 (600-1)	1960-1 $\frac{3}{4}$	557 (600-1 $\frac{3}{4}$)
C CIRCLING	1960-1	557 (600-1)	2020-1 $\frac{3}{4}$ 617 (700-1 $\frac{3}{4}$)	2180-2 $\frac{1}{2}$ 777 (800-2 $\frac{1}{2}$)

REIL Rwys 15 and 33
HIRL Rwy 15-33

FAF to MAP 5.5 NM					
Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

SULLIVAN COUNTY INTL (MSV)
ILS or LOC RWY 15