

DESTIN, FLORIDA

AL-5680 (FAA)

25107

WAAS CH 56623 W32A	APP CRS 323°	Rwy Idg 5001 TDZE 20 Apt Elev 22
--	------------------------	---


RNAV (GPS) RWY 32
DESTIN EXEC (DTS)

▼ Rwy 32 helicopter visibility reduction below $\frac{3}{4}$ SM NA. DME/DME RNP-0.3 NA. VDP NA when using Crestview altimeter setting. When local altimeter setting not received, use Crestview altimeter setting and increase all MDA 80 feet; increase LP Cats C and D visibility $\frac{1}{4}$ SM, increase LNAV Cats C and D visibility $\frac{3}{8}$ SM, and increase Circling Cat C visibility $\frac{1}{4}$ SM.


MISSED APPROACH:
Climbing left turn to
2000 direct AJLP and
hold.

ATIS 133.925	EGLN APP CON 132.1 360.6	DESTIN TOWER ★ 118.45 (CTAF) 0	GND CON 121.6	CLNC DEL 121.6 377.2	CLNC DEL 127.7 (When twr closed)
-----------------	-----------------------------	-----------------------------------	------------------	-------------------------	--

Procedure NA for arrival on
CEW VORTAC airway radials
073 CW 088.

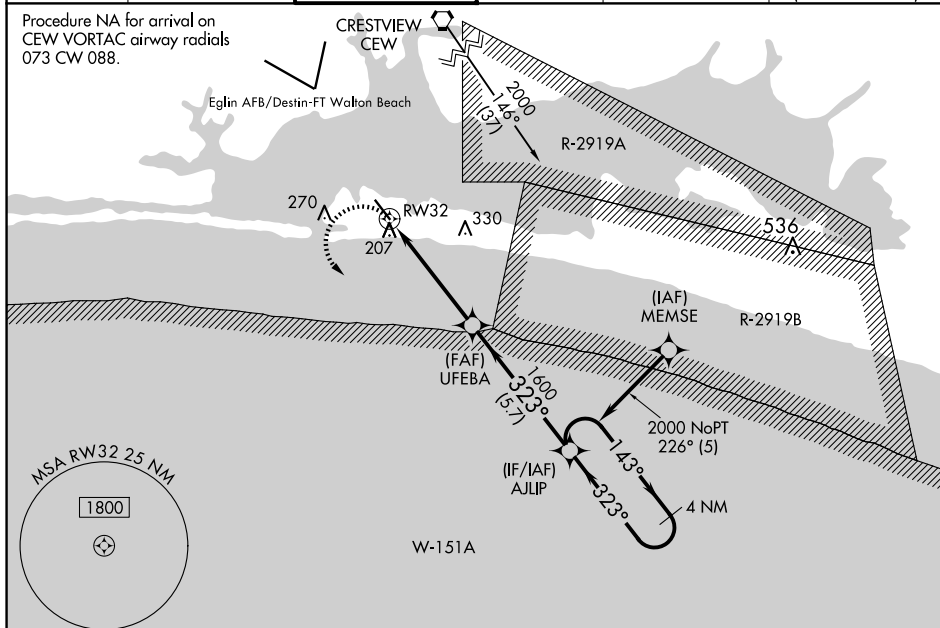

ELEV 22		TDZE 20
---------	--	---------

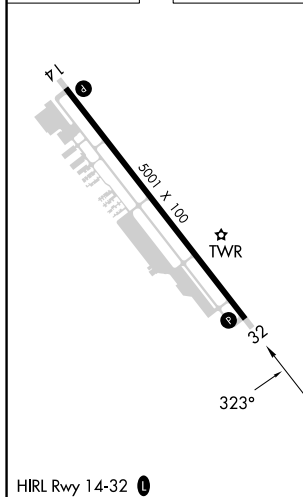

2000 AJLIP

4 NM Holding Pattern

1.2 NM to RW32

3.7 NM TCH 42

5.7 NM

143° 323°

2000

UFEBA

AJLIP

CATEGORY	A	B	C	D
LP MDA	440-1	420 (500-1)	440-1 $\frac{1}{8}$	420 (500-1 $\frac{1}{8}$)
LNAV MDA	540-1	520 (600-1)	540-1 $\frac{3}{8}$	520 (600-1 $\frac{3}{8}$)
C CIRCLING	580-1	558 (600-1)	680-1 $\frac{3}{4}$ 658 (700-1 $\frac{3}{4}$)	680-2 658 (700-2)

DESTIN, FLORIDA
Amdt 1C 07DEC17

30°24'N-86°28'W

DESTIN EXEC (DTS)
RNAV (GPS) RWY 32

SE-3, 17 APR 2025 to 15 MAY 2025