

WAAS CH 90237 W03A	APP CRS 028°	Rwy Idg TDZE Apt Elev	3701 2595 2595
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 3

MILLER FLD (VTN)


⚠

⚠

Baro-VNAV NA when using Ainsworth Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Ainsworth Rgnl altimeter setting. When local altimeter setting not received, use Ainsworth Rgnl altimeter setting and increase all DA 70 feet and all MDA 80 feet, increase LNAV/VNAV Cat A/B visibility ½ mile.

MISSED APPROACH:
Climb to 5000 direct
MAIMS and hold.

ASOS 118.075	DENVER CENTER 127.95 338.2	UNICOM 122.8 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

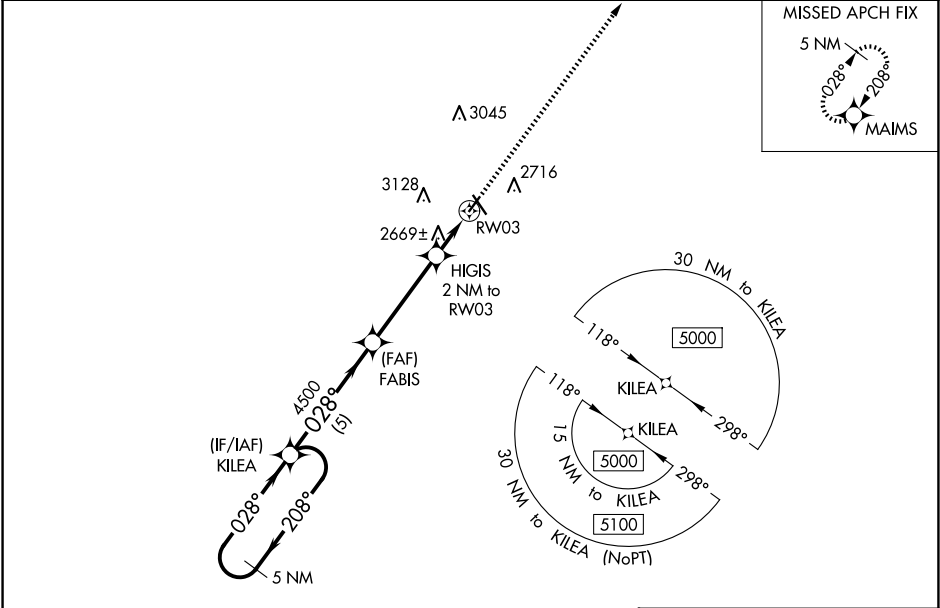

ELEV 2595 TDZE 2595

5 NM Holding Pattern

KILEA

5000

←208°

→028°

GP 3.00°

TCH 39

FABIS

4500

HIGIS
2 NM to
RW03

5000

MAIMS

*LNAV only.

*0.8 NM to
RW03

RW03

*3260

5 NM

3.9 NM

1.2 NM

0.8 NM

CATEGORY	A	B	C	D
LPV DA	2845-1	250 (300-1)	NA	
LNAV/VNAV DA	2845-1	250 (300-1)	NA	
LNAV MDA	2920-1	325 (400-1)	NA	
CIRCLING	3080-1 485 (500-1)	3560-1½ 965 (1000-1½)	NA	

REIL Rwy 32 0

MIRL Rwy 3-21 and 14-32 0

⬢ 1

⬢ 2

⬢ 3

⬢ 4

⬢ 5

⬢ 6

⬢ 7

⬢ 8

⬢ 9

⬢ 10

⬢ 11

⬢ 12

⬢ 13

⬢ 14

⬢ 15

⬢ 16

⬢ 17

⬢ 18

⬢ 19

⬢ 20

⬢ 21

⬢ 22

⬢ 23

⬢ 24

⬢ 25

⬢ 26

⬢ 27

⬢ 28

⬢ 29

⬢ 30

⬢ 31

⬢ 32

028°

3701 X 60

4705 X 75

MILLER FLD (VTN)

RNAV (GPS) RWY 3

NC-2, 17 APR 2025 to 15 MAY 2025

NC-2, 17 APR 2025 to 15 MAY 2025