

WAAS	APP CRS	Rwy Idg	3995
CH 78005	049°	TDZE	1027
W05A		Apt Elev	1072

RNAV (GPS) RWY 5

NEW CASTLE MUNI (UCP)


RNP APCH.

⚠

VDP NA when using Youngstown/Warren Rgnl altimeter setting. Rwy 5 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Youngstown/Warren Rgnl altimeter setting and increase all DA 61 feet and all MDA 80 feet; increase LNAV Cat C and Circling Cat C visibility ¼ SM.

MISSED APPROACH:
Climb to 3000 direct ZARTO and hold.

AWOS-3PT 124.175	YOUNGSTOWN APP CON ★ 133.95 322.3	UNICOM 123.0 (CTAF) 0
---------------------	--------------------------------------	--------------------------

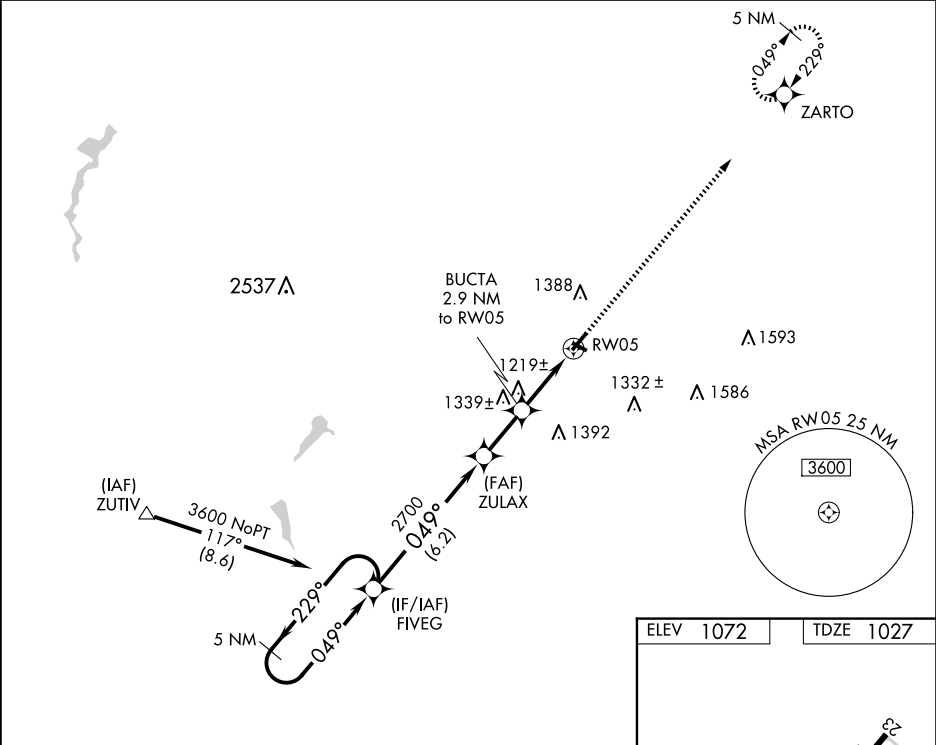

ELEV 1072	TDZE 1027
-----------	-----------

5 NM Holding Pattern

FIVEG

ZULAX

BUCTA 2.9 NM to RW05

3000 ZARTO

*INAV only.

3600

←229°

049°→

049°

GP 3.00° TCH 53

2700

*2000

*1.3 NM to RW05

RW05

6.2 NM

2.1 NM

1.6

1.3

CATEGORY

A

B

C

D

LPV DA

1307-1

280 (300-1)

NA

LNAV MDA

1480-1

453 (500-1)

1480-1⅜
453 (500-1⅜)

NA

CIRCLING

1600-1
528 (600-1)

1700-1
628 (700-1)

1700-1⅜
628 (700-1⅜)

NA

