

WAAS  
CH 40115  
W33A

APP CRS  
326°

Rwy Idg  
TDZE  
Apt Elev

4000  
1025  
1025

RNAV (GPS) RWY 33

PLATTEVILLE MUNI (PVB)

RNP APCH - GPS


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use DBQ altimeter setting and increase LPV DA to 1331 feet; increase LNAV/VNAV DA to 1497 feet and all Cts visibilities ¼ SM; increase all MDAs 60 feet, increase LNAV and Circling Cat C visibility ¼ SM. Baro-VNAV and VDP NA when using DBQ altimeter setting. Circling Rwy 7, 25 NA at night.

MISSED APPROACH:  
Climb to 3000 direct CEWUF and hold.

AWOS-3  
120.575

CHICAGO CENTER  
133.95 281.4

UNICOM  
122.7 (CTAF)

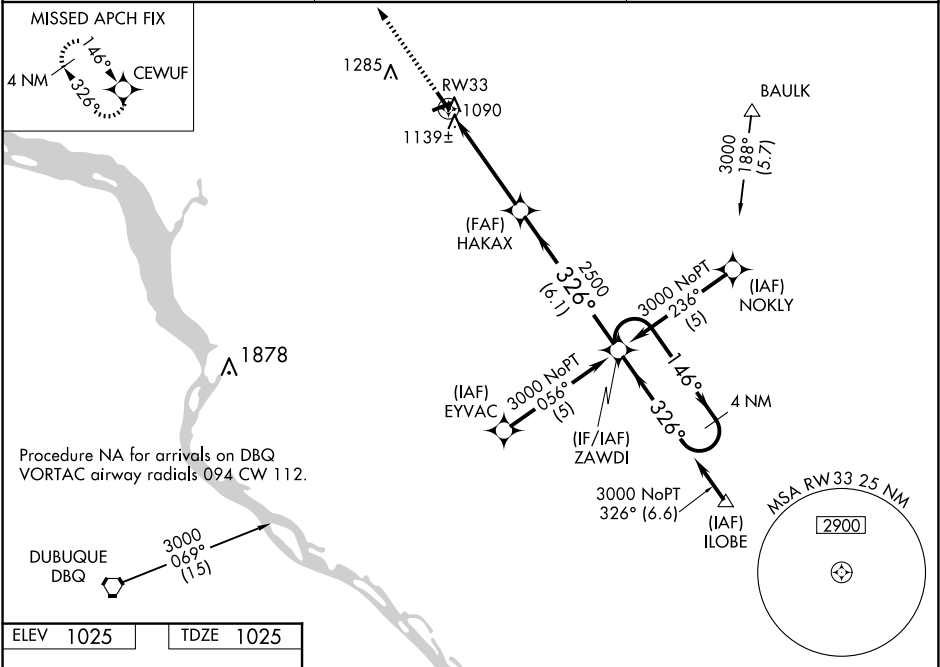

ELEV 1025

TDZE 1025

3000

CEWUF

VGSI and RNAV glidepath not coincident  
(VGSI Angle 3.00/TCH 25).

4 NM Holding Pattern

ZAWDI

146°

326°

3000

GP 3.00°  
TCH 40

\* LNAV only

RW33

1.1 NM to RW33

HAKAX

326°

2500

1.1 NM

3.4 NM

6.1 NM

| CATEGORY     | A                     | B                     | C                       | D  |
|--------------|-----------------------|-----------------------|-------------------------|----|
| LPV DA       | 1275-1                | 250 (300-1)           |                         | NA |
| LNAV/VNAV DA | 1441-1½               | 416 (500-1½)          |                         | NA |
| LNAV MDA     | 1400-1                | 375 (400-1)           |                         | NA |
| CIRCLING     | 1460-1<br>435 (500-1) | 1600-1<br>575 (600-1) | 1600-1½<br>575 (600-1½) | NA |