


Baro-VNAV NA when using Wilmington altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. VDP NA with Wilmington altimeter setting. When local altimeter setting not received, use Wilmington altimeter setting and increase LPV DA to 387 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 591 feet; increase all MDAs 100 feet and LNAV visibility Cat C/D ¾ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH:
Climb to 2100 direct
CUVAL and hold.

ATIS 124.475	WILMINGTON APP CON ★ 135.75 317.425	ELLIS TOWER ★ 132.65 (CTAF) 0	GND CON 125.4	CLNC DEL 121.4 257.6 (when twr closed)	UNICOM 122.95
-----------------	--	----------------------------------	------------------	--	------------------

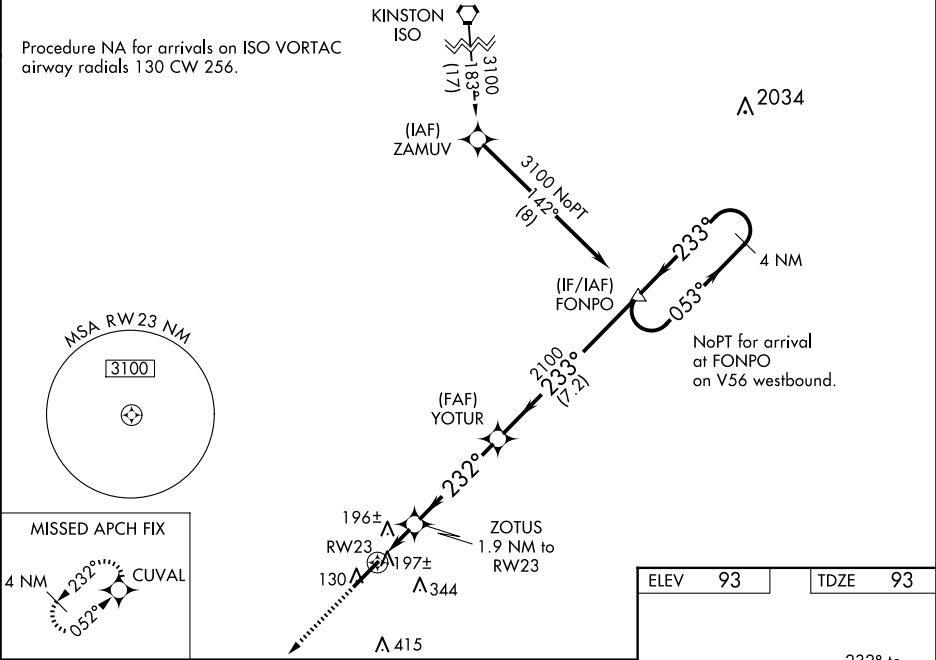

2100	CUVAL
*LNAV only.	
RW23	ZOTUS 1.9 NM to RW23
*1 NM to RW23	YOTUR 2100
*740	FONPO 4 NM Holding Pattern
232°	233°
2100	3100
GP 3.00°	TCH 47
1 NM	0.9 NM
4.3 NM	7.2 NM
CATEGORY	A
LPV DA	293-¾ 200 (200-¾)
LNAV/ VNAV DA	497-1⅓ 404 (500-1⅓)
LNAV MDA	460-1 367 (400-1)
CIRCLING	540-1 447 (500-1) 560-1 467 (500-1) 720-1¾ 627 (700-1¾) 720-2 627 (700-2)

