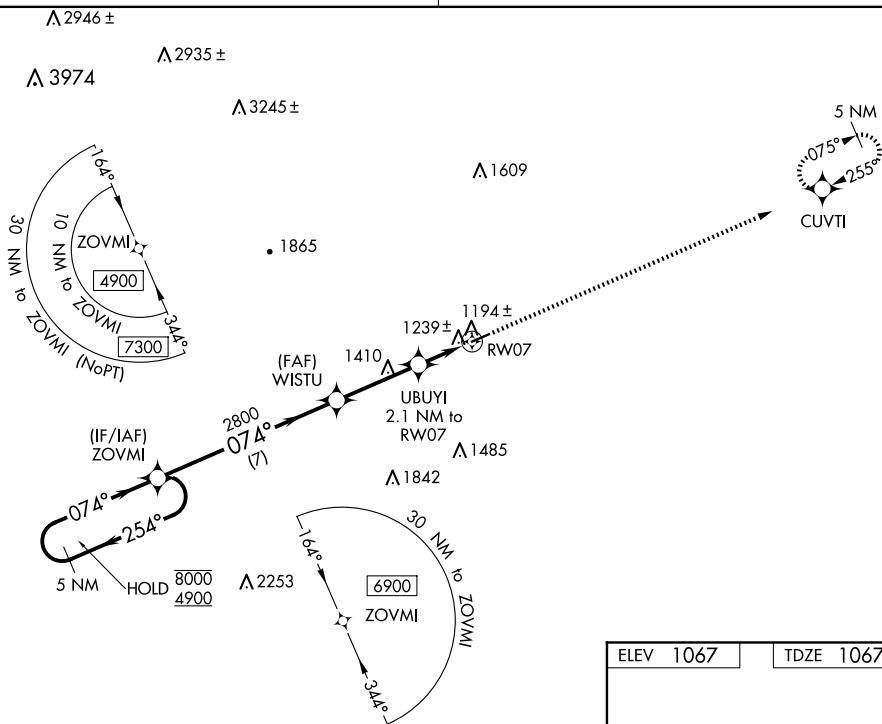


Rwy Idg	4001
TDZE	1067
Apt Elev	1067

RNAV (GPS) RWY 7
ELKIN MUNI (ZEF)

T Procedure NA at night. Obtain local altimeter setting on CTAF; when not received, use
A NA Mount Airy altimeter setting and increase all MDAs 80 feet and all Cats C/D visibilities
 ¼ SM. Rwy 7 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 5100 direct CUVTI and hold, continue climb-in-hold to 5100.

UNICOM
123.05 (CTAF) **L**



ELEV 1067		TDZE 1067
-----------	--	-----------

5 NM
Holding Pattern

Visual Segment - Obstacles.

5100

CUVT

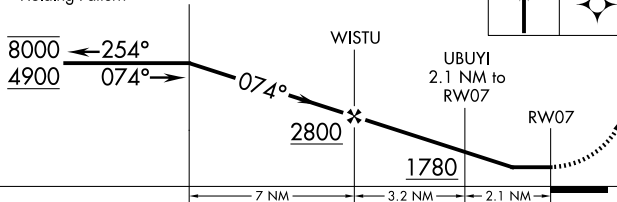

CATEGORY	A	B	C	D
LP MDA	1460-1	393 (400-1)	1460-1 $\frac{1}{8}$	393 (400-1 $\frac{1}{8}$)
LNAV MDA	1500-1	433 (500-1)	1500-1 $\frac{1}{4}$	433 (500-1 $\frac{1}{4}$)
C CIRCLING	1540-1 473 (500-1)	1600-1 533 (600-1)	1680-1 $\frac{3}{4}$ 613 (700-1 $\frac{3}{4}$)	1840-2 $\frac{1}{2}$ 773 (800-2 $\frac{1}{2}$)

MIRL Rwy 7-25 **L**
REIL Rwy 7 and Rwy 25 **L**