

WAAS CH 53303 W26A	APP CRS 263°	Rwy Idg TDZE Apt Elev	5102 3254 3279
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 26
SEARLE FLD (OGA)

RNP APCH



T When local altimeter setting not received, use Imperial altimeter setting and increase **all** DA 86 feet and **all** MDA 100 feet, increase LPV **all** Cots visibility $\frac{1}{8}$ SM, LNAV/VNAV **all** Cots and Circling Cat B visibility $\frac{1}{4}$ SM. VDP and Baro-VNAV NA when using Imperial altimeter setting. For non-precision Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C.

MISSED APPROACH:
Climb to 5300 direct
AHUFU and hold.

AWOS-3 121.275	DENVER CENTER 132.7 397.85	UNICOM 122.8 (CTAF) 0
--------------------------	--------------------------------------	--

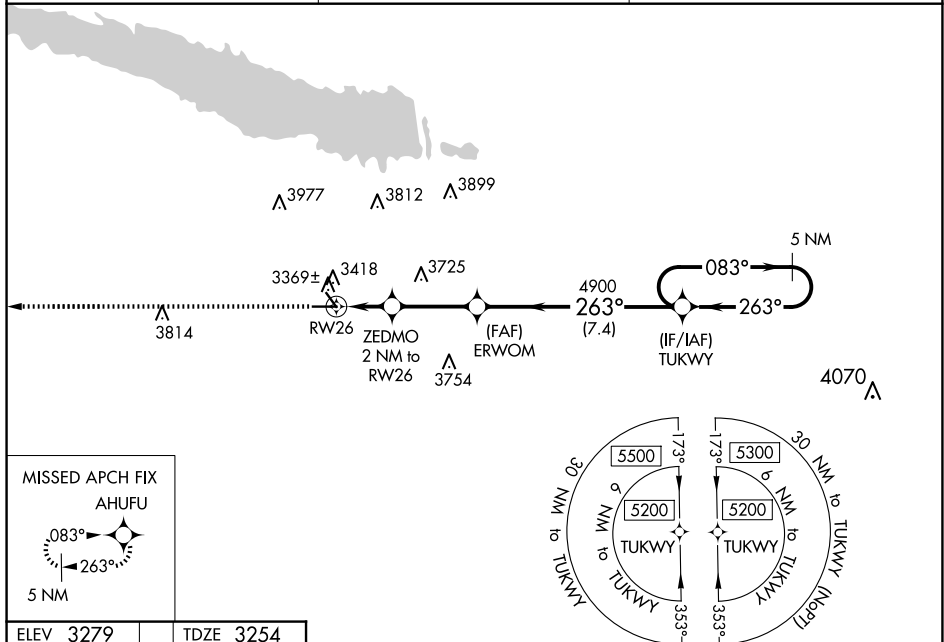

ELEV 3279	TDZE 3254
-----------	-----------

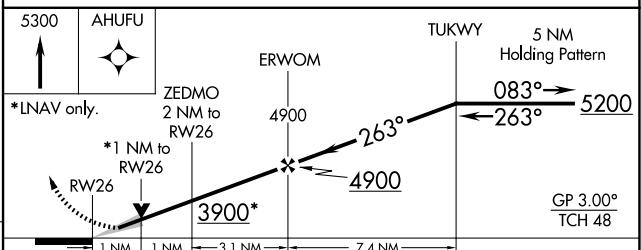

CATEGORY		A	B	C	D
LPV	DA	3504-1	250 (300-1)	NA	
LNAV/ VNAV	DA	3540-1	286 (300-1)	NA	
LNAV	MDA	3620-1	366 (400-1)	NA	
CIRCLING		3940-1 661 (700-1)	4000-1 721 (800-1)	NA	