

VORTAC STL	APP CRS	Rwy Idg	3800
117.4	208°	TDZE	437
Chan 121		Apt Elev	437



VOR RWY 18

ST CHARLES COUNTY RGNL/SMARTT FLD (SE/T)

⚠ When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase all MDAs 60 feet and Circling visibility Cat C ¼ SM. NUPDE fix minimums: increase Circling visibility Cat C ¼ SM. Straight-in minimums NA with St Louis Lambert Intl altimeter setting.

MISSED APPROACH: Climb to 1000 then climbing left turn to 2700 via heading 360° and STL R-031 to FASHE INT/19.4 DME and hold.

ASOS 118.075	ST. LOUIS APP CON 124.2 353.9	CLNC DEL 121.6	UNICOM 122.7 (CTAF) 0
-----------------	----------------------------------	-------------------	--------------------------

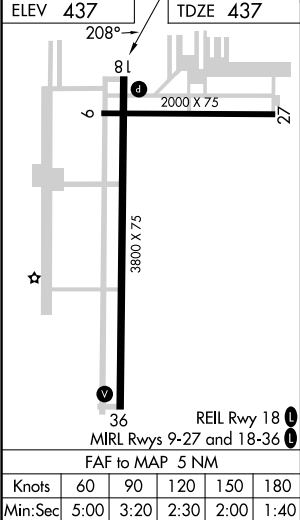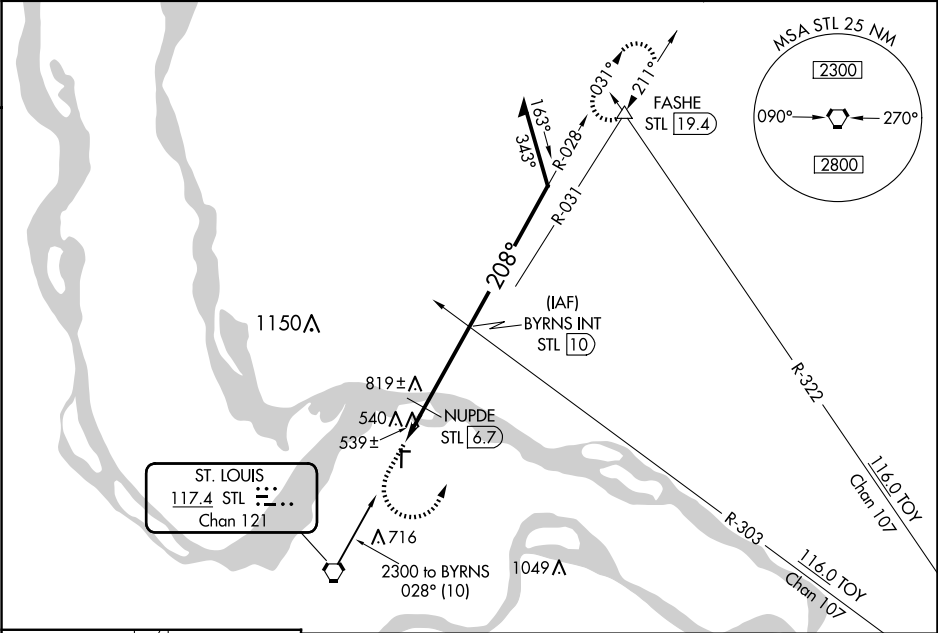

ELEV 437	TDZE 437	1000	2700	STL R-031	FASHE	BYRNS INT STL 10	Remain within 10 NM
208°	hdg 360°	STL 5	STL 6	NUPDE STL 6.7	1160*	2300	*1220 when using St Louis Lambert Intl altimeter setting.
VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 40).	3.77° TCH 43	1 NM	0.7 NM	3.3 NM			
CATEGORY	A	B	C	D	NUPDE FIX MINIMUMS		
S-18	1160-1	723 (800-1)	1160-2 723 (800-2)	NA			
CIRCLING	1160-1	723 (800-1)	1220-2¼ 783 (800-2¼)	NA			
S-18	800-1 363 (400-1)			NA			
CIRCLING	840-1 403 (500-1)	900-1 463 (500-1)	1220-2¼ 783 (800-2¼)	NA			