


LOC I-BGE	APP CRS	Rwy Idg	5502
111.35	274°	TDZE	134
		Apt Elev	141


ILS or LOC RWY 27
DECATUR COUNTY INDUSTRIAL AIR PARK (BGE)

ADF required. When local altimeter setting not received, use Tallahassee Intl altimeter setting and increase S-ILS 27 DA to 429 feet and all MDA 100 feet; increase S-LOC 27 visibility Cat C, D ¼ SM and Circling Cat C, D visibility ½ SM. For inop MALSRL, when using Tallahassee Intl altimeter setting increase S-ILS 27 all Cats visibility to 1 mile.	MALSRL	MISSED APPROACH: Climb to 1200 then climbing right turn to 1900 direct LYZ NDB and hold.
--	--------	--

AWOS-3PT 121.125	TALLAHASSEE APP CON★ 128.7 254.3	CLNC DEL 124.775 335.65	UNICOM 122.975 (CTAF)
---------------------	-------------------------------------	----------------------------	--------------------------

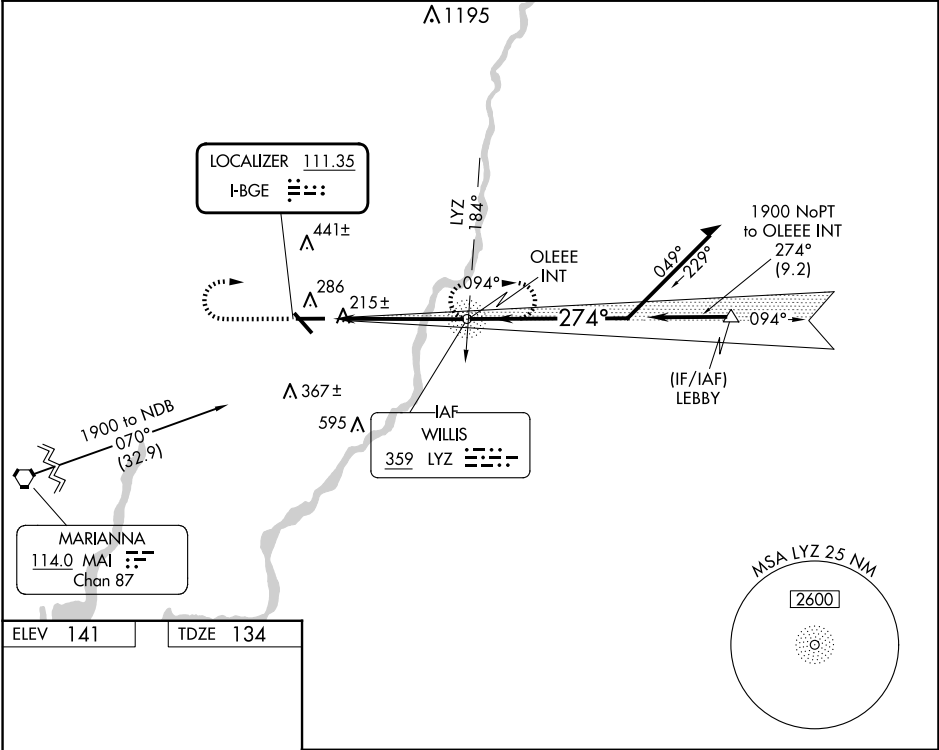

ELEV 141	TDZE 134
----------	----------

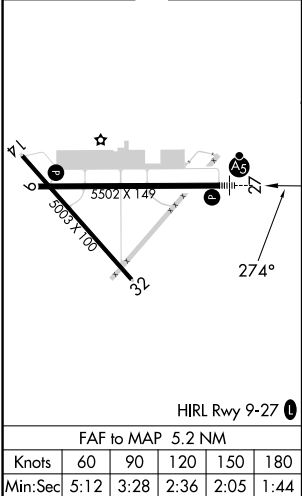

1200	1900	LYZ	LYZ NDB	Remain within 10 NM
			OLEEE INT 1900	GS 3.00° TCH 37
			094°	1900
			274°	
			5.2 NM	
CATEGORY	A	B	C	D
S-ILS 27		334-½	200 (200-½)	
S-LOC 27		480-½	346 (400-½)	480-¾ 346 (400-¾)
CIRCLING	600-1	459 (500-1)	800-1¾ 659 (700-1¾)	860-2¼ 719 (800-2¼)