

WAAS

CH **45905**

W22A

APP CRS

215°

Rwy Idg

7193

TDZE

26

Apt Elev

26

RNAV (GPS) RWY 22


PUNTA GORDA (PGD)

RNP APCH.

⚠ Baro-VNAV NA when using Page Fld altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C or above 54°C. When local altimeter setting not received, use Page Fld altimeter setting and increase LPV DA to 276, LNAV/VNAV DA to 360, and all MDAs 60 feet; increase LNAV Cats C and D visibility ¼ SM, and Circling Cats C and D visibility ¼ SM.

MISSED APPROACH: Climb to 2000 direct BULOW and hold.

ATIS 135.675	FORT MYERS APP CON ★ 127.05 306.2	PUNTA GORDA TOWER ★ 121.0 (CTAF) 0	GND CON 119.55	CLNC DEL 119.55	CLNC DEL 127.05 (When twr closed)	UNICOM 122.975
------------------------	---	--	--------------------------	---------------------------	--	--------------------------

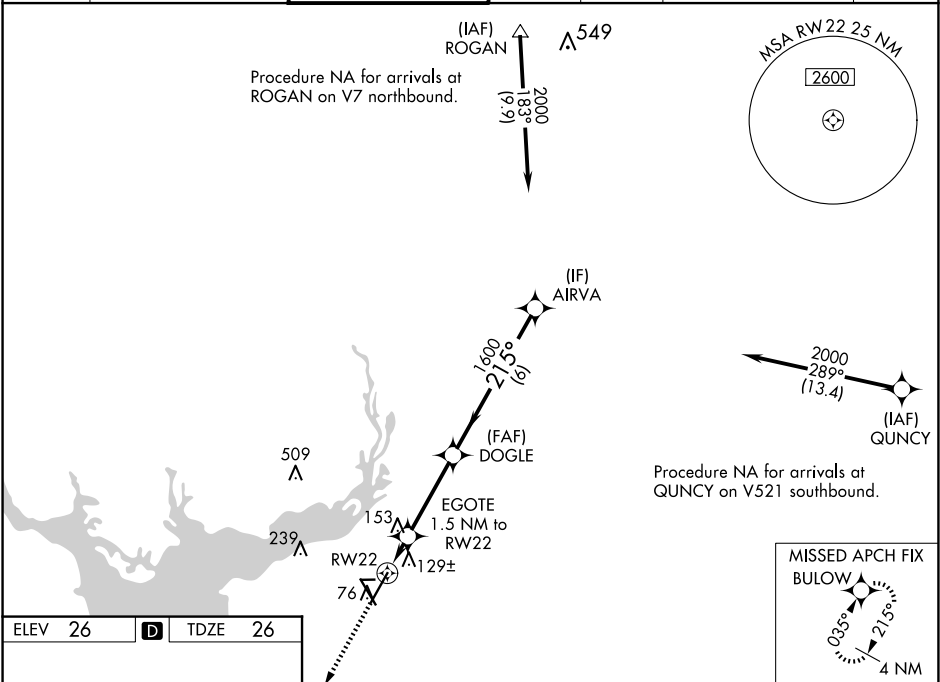

2000

↑

BULOW

✦

VGSI and descent angles not coincident

(VGSI Angle 3.00/TCH 31).

*LNAV only.

EGOTE

1.5 NM to RW22

DOGLE

1600

AIRVA

2000

GP 3.00°

TCH 40

1.5 NM

3.3 NM

6 NM

CATEGORY	A	B	C	D
LPV DA	226- ³ / ₄ 200 (200- ³ / ₄)			
LNAV/VNAV DA	310-1 284 (300-1)			
LNAV MDA	420-1 394 (400-1)		420-1 ¹ / ₈ 394 (400-1 ¹ / ₈)	
CIRCLING	460-1	580-1	600-1 ¹ / ₂	740-2 ¹ / ₄
	434 (500-1)	554 (600-1)	574 (600-1 ¹ / ₂)	714 (800-2 ¹ / ₄)

HIRL Rwy 4-22

MIRL Rwy 15-33

REIL Rws 4, 15, 22 and 33