APP CRS	Rwy ldg	5001
093°	TDZE	790
	Apt Elev	790

RNAV (GPS) RWY 9
BULT FLD (C56)

NA DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Use Lansing Muni altimeter setting; when not received, use Chicago Midway Intl altimeter setting and increase all MDA 40 feet. Procedure NA at night.

MISSED APPROACH: Climbing right turn to 2600 direct EON VORTAC and hold.

AWOS-AV	IGQ AWOS-3PT	CHICAGO CENTER	UNICOM
119.125	124.925	132.5 284.7	123.0 (CTAF)

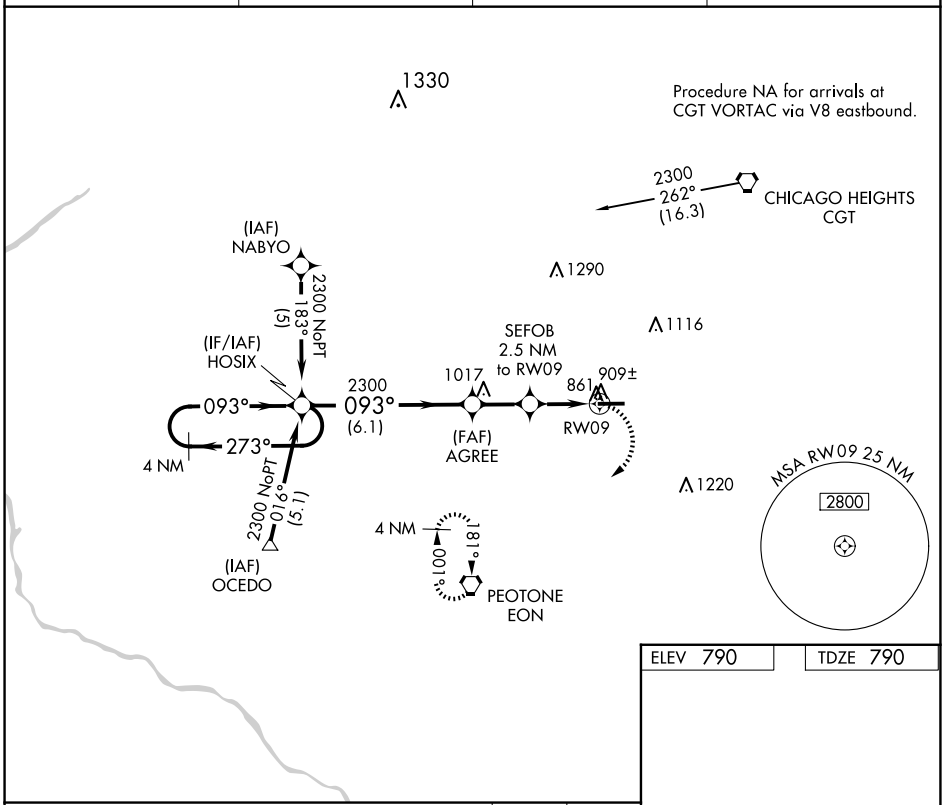

ELEV 790	TDZE 790

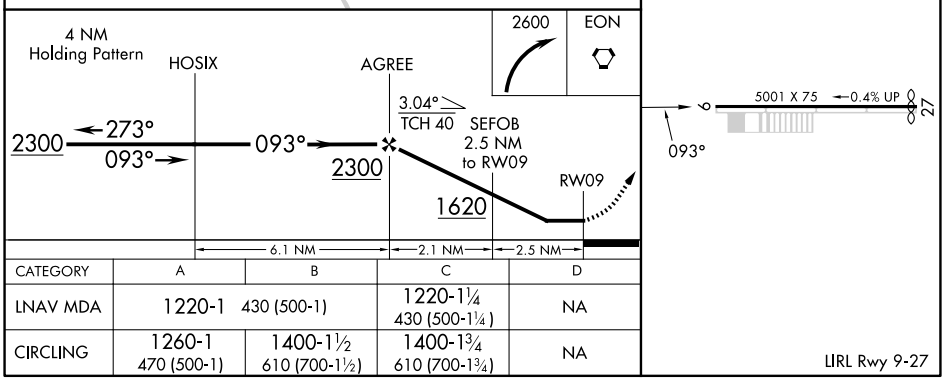

CATEGORY	A	B	C	D
LNAV MDA	1220-1 430 (500-1)		1220-1¼ 430 (500-1¼)	NA
CIRCLING	1260-1 470 (500-1)	1400-1½ 610 (700-1½)	1400-1¾ 610 (700-1¾)	NA

LIRL Rwy 9-27

EC-3, 17 APR 2025 to 15 MAY 2025

EC-3, 17 APR 2025 to 15 MAY 2025