

WAAS CH 50333 W01A	APP CRS 013°	Rwy Idg 3200 TDZE 857 Apt Elev 858
--	------------------------	---

RNAV (GPS) RWY 1
KEWANEE MUNI (EZI)


T Baro-VNAV NA. DME/DME RNP-0.3 NA. Helicopter visibility reduction below $\frac{3}{4}$ SM NA.
A NA Use Galesburg altimeter setting; when not received, use Moline altimeter setting and increase all DA 29 feet and all MDA 40 feet, increase LPV all Cats visibility $\frac{1}{8}$ mile, and Circling Cat C visibility $\frac{1}{4}$ mile.

MISSED APPROACH:
Climb to 2400 direct
YABYU and hold.



QUAD CITY APP CON ★
133.275 257.8

UNICOM
122.8 (CTAF) **L**

MISSED APCH FIX

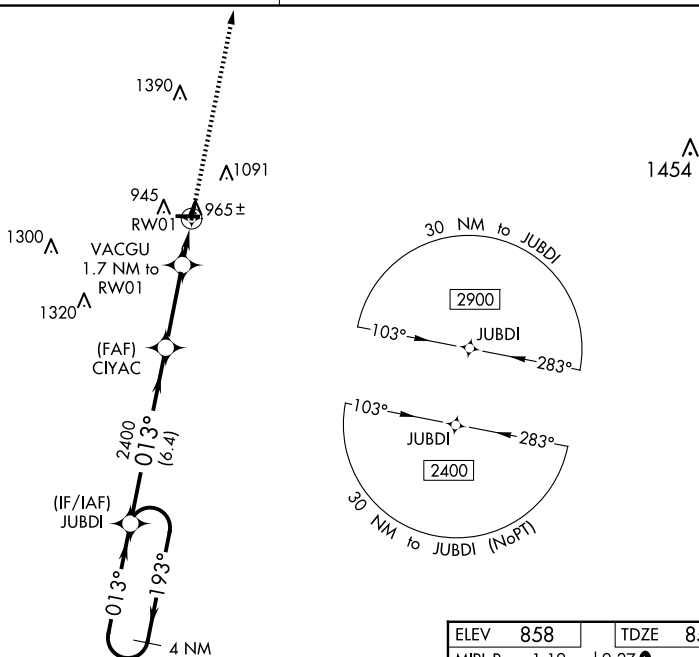4 NM
Holding Pattern

*LNAV only	2400	YABYU
------------	------	-------

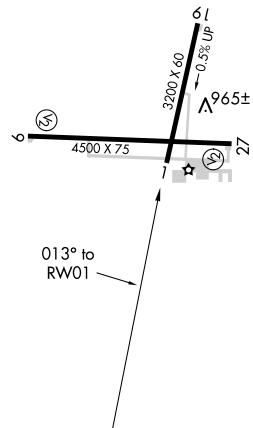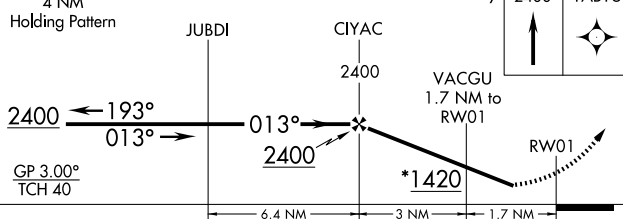

CATEGORY	A	B	C	D
LPV DA	1182-1 $\frac{1}{8}$ 325 (400-1 $\frac{1}{8}$)			NA
LNAV/VNAV DA	1212-1 $\frac{1}{4}$ 355 (400-1 $\frac{1}{4}$)			NA
LNAV MDA	1300-1 443 (500-1)		1300-1 $\frac{3}{8}$ 443 (500-1 $\frac{3}{8}$)	NA
 CIRCLING	1340-1 482 (500-1)	1520-1 662 (700-1)	1520-1 $\frac{3}{4}$ 662 (700-1 $\frac{3}{4}$)	NA

KEWANEE, ILLINOIS
Amdt 1A 05MAR15

41°12'N-89°58'W

KEWANEE MUNI (EZI)
RNAV (GPS) RWY 1